


4

3

2

1

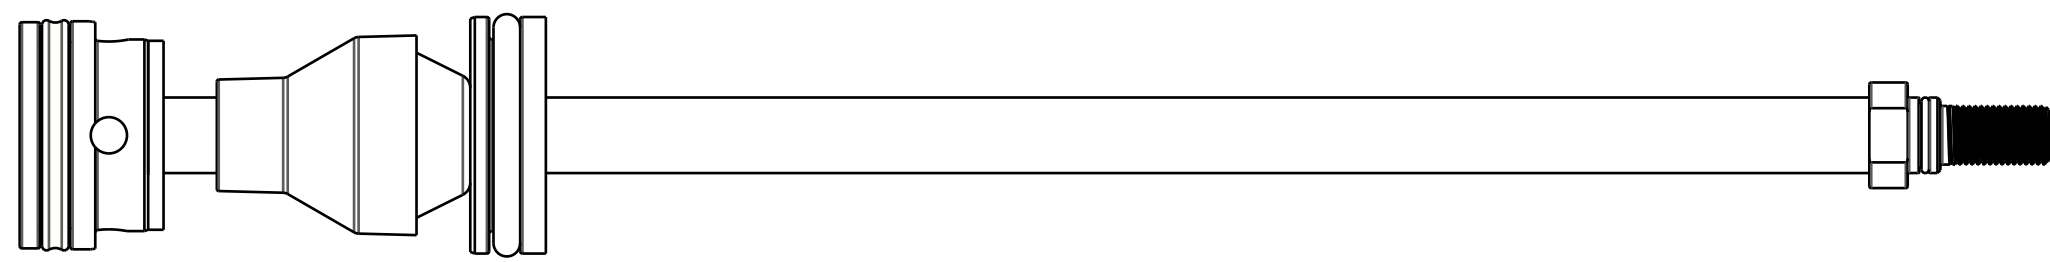

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655
Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

029-08-060

029-08-022

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-544-KIT
Neg Plate Subassembly, 2019, 36 Rhythm,
1.275 Bore, No Spacer

IMPORTANT:
GROOVE FACES
PISTON

234-04-629
Topout Bumper, FLOAT NA

234-04-739
Topout Spacer, Float, Rhythm

GREASE:
THIN LAYER
OF SLICK HONEY

SHAFT

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

018-05-057
Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

060-01-010
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

222-01-336
Piston, FLOAT NA 2 LC, 36 Rhythm, 1.270 Bore

035-00-214
Seals: Q-Ring [(-214) .139 C.S. X 0.984 ID]

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**2019 36 Rhythm FLOAT
NA2 Air Shaft Assemblies**

SIZE DWG. NO.

C

PLOT SCALE | .00 : 1 |

SHEET | OF | 1

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM