


4

3

2

1

**AIR SHAFT ASSEMBLIES:**  
 820-02-533-KIT: Air Shaft Assy, 2019, 32 SC, 80mm, FLOAT LC NA 2, 1.132 Bore, AI NP  
 820-02-532-KIT: Air Shaft Assy, 2019, 32 SC, 100mm, FLOAT LC NA 2, 1.132 Bore, AI NP  
 820-02-555-KIT: Air Shaft Assy, 2019, 32 SC, 40mm, FLOAT LC NA 2, 1.132 Bore, AI NP

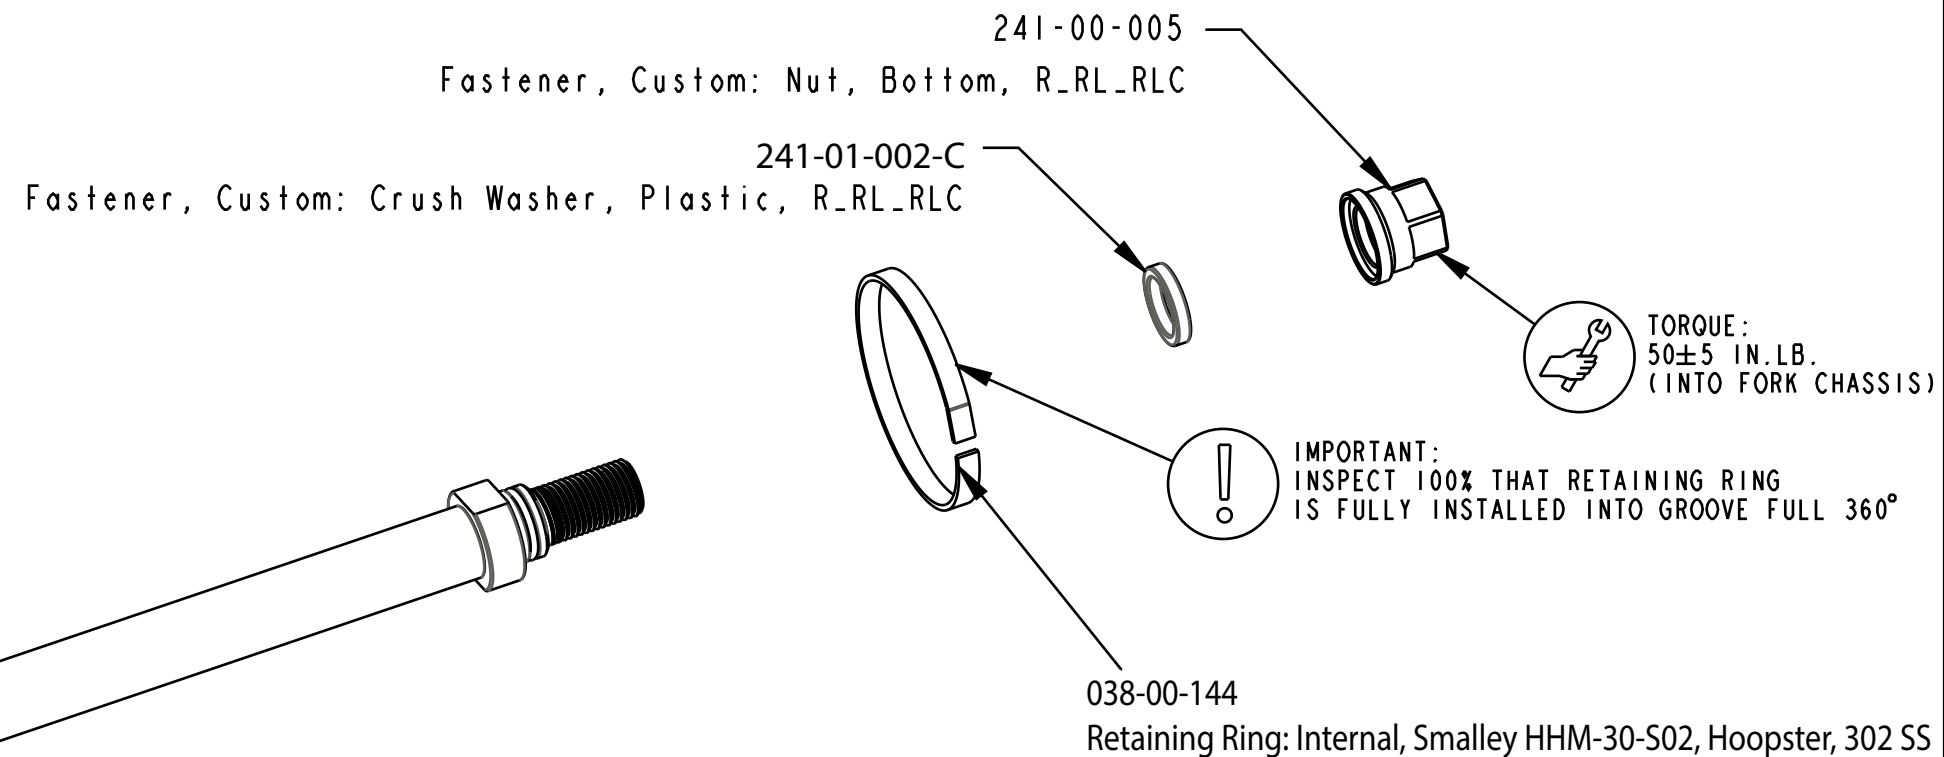

029-03-008  
O-Ring (-008) [.070 C.S. X .176 ID]

820-05-417-KIT  
Topcap Assy, 2018, FLOAT LC NA 2, 32, Black, SC


GREASE:  
THIN LAYER  
OF SLICK HONEY

APPLY GREASE AROUND PISTON, ON AIR SHAFT,  
BETWEEN BUMPER AND NEG PLATE, AND A THIN LAYER ON ENTIRE  
LENGTH OF PISTON BORE OF UPPER TUBE ID.

234-04-811  
Volume Spacer, FLOAT NA 2, 32

TORQUE:  
220±5 IN.LB.  
(INTO FORK CHASSIS)

234-04-881  
Air Cap, FLOAT NA 2, 32 & 34, Blue Ano

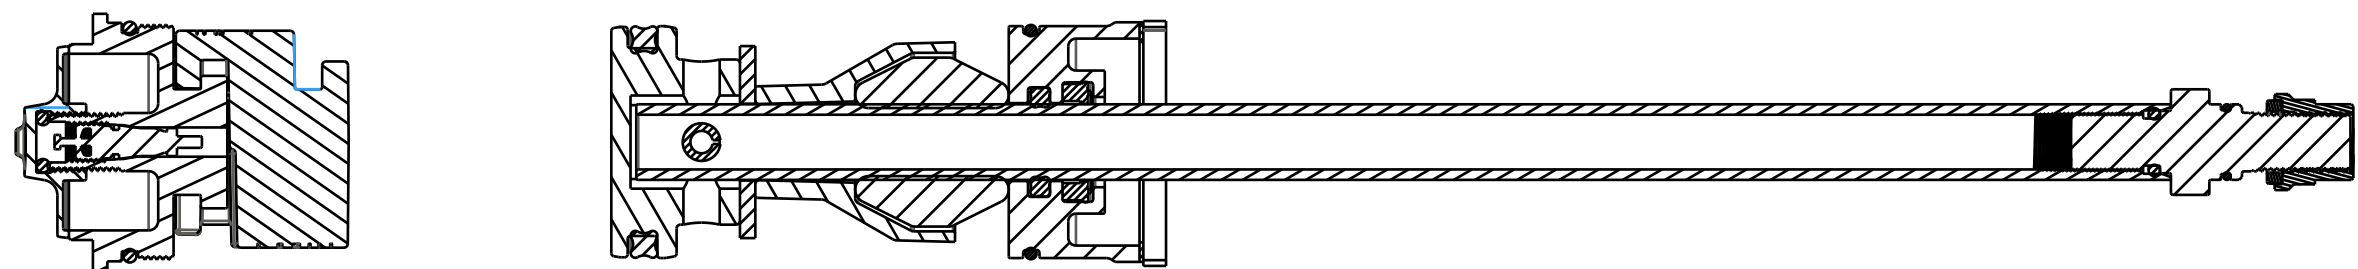

**FOX** FOX Factory, Inc. Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2019 32 SC Air Spring Assemblies**

SIZE DWG. NO.  
**C**

PLOT SCALE | .00:1 | SHEET | OF |

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM