

4

3


2

1

— PROPRIETARY —
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY
INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO
OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

!
IMPORTANT:
PRESS BUSHING FLUSH
TO THIS SURFACE

!
IMPORTANT:
ENSURE QUAD RING
IS NOT TWISTED

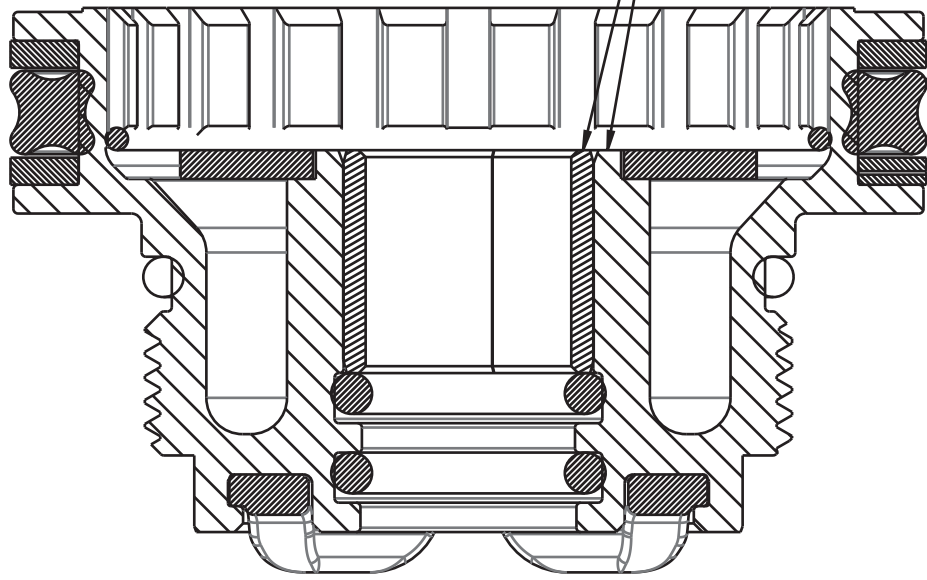

SECTION A-A
SCALE 3:1

Retaining Ring: Wire [0.039 CS X 1.260 OD] 304 SS

Spacer: Bottom Out Plate, Bearing Side [1.177 OD, 0.050 THK]

GREASE:
THIN LAYER
OF SLICK HONEY

GREASE:
THIN LAYER
OF SLICK HONEY

GREASE:
THIN LAYER
OF SLICK HONEY

(Bearing: Backup Ring, External, [Ø 1.600 Bore])

Seal, Custom, Q-Ring, X2 Air Piston, LTS

Bearing: Backup Ring, External, [Ø 1.600 Bore]

Bearing, (T): Internal [9mm ID x 11mm OD x .387 IN TLG, 9mm Shaft]

Bearing Housing: Float X2, CI [1.25 Body, 1.6 Air Sleeve, 9mm ST Shft, B/O Spcr]

Seals: O-Ring [(-022) .070 C.S. X .989 ID] PU, 92A, S.C.

Seals: O-Ring [8.5mm ID x 1.8mm CS] Metric, TSS, NBR, Dynamic

Seals: O-Ring [8.5mm ID x 1.8mm CS] Metric, TSS, NBR, Dynamic

Bumper: T/O [Ø 0.375 Shaft, 0.170 TLG]



FOX Factory, Inc.
2055 Sugarloaf Circle, Suite 300
Duluth, Ga 30097 USA Phone 800-369-7469

TITLE Bearing Assy: 2019 Float X2,
[.940 Bore, 1.600 Bore, 9mm Shaft],
B/O Spacer, CI

SIZE C DWG. NO. 812-06-120-KIT

REV A

PLOT SCALE: 2:1

SHEET: 1 OF 1

4

3

2

1