

4

3

2

1

Fastener Standard (Metric): Screw, Socket Head, M2.5 X 8

TORQUE:
4±1 IN.LB.

COMP SELECTOR KNOB

820-05-553-KIT
2019 Grip 34 & 36 Rhythm Topcap Interface Parts

Seals: O-Ring Custom: [1.066 C.S. X .742 ID] N-70, Static

GREASE:
THIN LAYER
OF SLICK HONEY


BOTTOM STUD INTERFACE PARTS:
820-05-326-KIT: 2017 34 29in Grip Bottom Stud Interface Parts
820-05-374-KIT: 2017 Grip Bottom Stud Interface Parts

241-01-002-C
Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

Fastener, Standard: Screw [#8-32 X 0.250 TLG]

TORQUE:
5.0±0.5 IN.LB.

LOCTITE:
BLUE 242 OR 243
ONE DROP

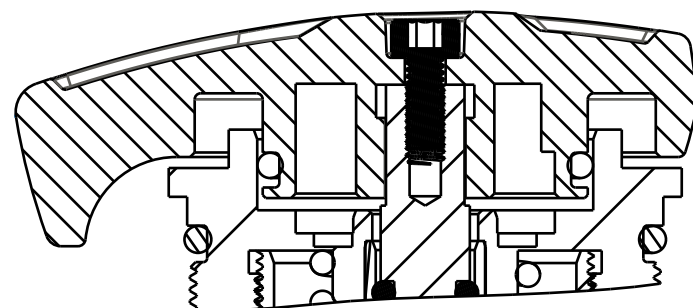

SECTION A-A
SCALE 2.000

REFERENCE ONLY
(FOR INSTALLATION
INTO FORK)

TORQUE:
50±5
IN-LBS

REBOUND KNOB

241-00-005
Fastener, Custom: Nut, Bottom, R_RL_RLC

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2021 34 E-BIKE+ RHYTHM GRIP
CARTRIDGE ASSEMBLIES COMPLETE

SIZE DWG. NO.

C

PLOT SCALE 0.75:1

SHEET 1 OF 2

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1