

Cable Pulley, Remote, LSC, FIT4, Bearing, Thru Broached

TOPCAP INTERFACE PARTS:  
 820-05-455-KIT: 2018 FIT4 TopCap Interface Parts F-S Remote, U-Cup, Push-Unlock  
 820-05-456-KIT: 2018 FIT4 TopCap Interface Parts F-S Remote, U-Cup, Push-Lock

820-05-705-KIT  
 2022 34SC Bottom Stud Interface Parts, All Dampers

TORQUE:  
 $50 \pm 5$  IN-LBS - REFERENCE ONLY,  
 FOR INSTALLATION INTO FORK

Seals: O-Ring [10.0MM ID x 2.0MM CS] Metric, N-70, Static

Screw [M2.5 X 6mm] Socket Head Cap, Stainless

TORQUE:  
 $5.0 \pm 1.0$  IN-LBS

REBOUND KNOB

241-00-005  
 Fastener, Custom: Nut, Bottom, R\_RL\_RLC

241-01-002-C  
 Fastener, Custom: Crush Washer, Plastic, R\_RL\_RLC

TORQUE:  
 $11 \pm 3$  IN-LBS

REMOTE HOUSING

TORSION SPRING


Bearing, Roller, 14mm OD x 7mm ID x 3.5mm TLG

Set Screw [M4x4mm], SST, Cup Point, Patchlock

Remote Compression Adjust Knob, F-S, FIT4

Fastener, Standard (Metric): Screw [M3 X 6mm] SHCS, Patchlock

IMPORTANT:  
 NOTE O-RING LOCATION  
 AT BOTTOM OF TOP CUT-OUT

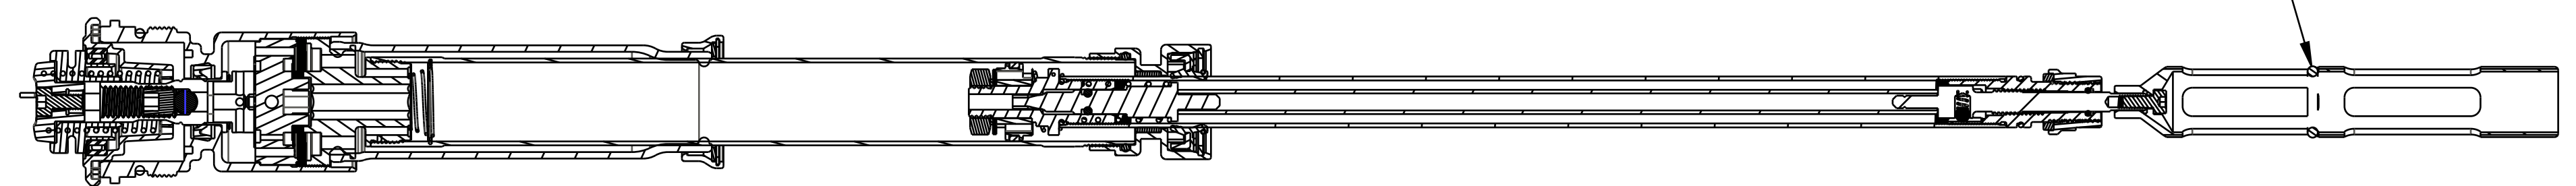

SECTION B-B

PROPRIETARY - PROPRIETARY INFORMATION  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOR PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX Factory, Inc.**  
 130 Hangar Way, Watsonville, CA 95076 USA  
 Ph 831-768-1100  
 Fax 831-768-9312

TITLE  
**2022 34 SC 120 MAX FIT4 REMOTE  
 CARTRIDGE ASSEMBLIES COMPLETE**

SIZE DWG. NO.  
 D

PLOT SCALE 1.00:1

SHEET 1 OF 1