

4

3

2

1

Retaining Ring: Wire [1.280 OD X .024 CS] SS

Compression Adjust Coupler, F-S, FIT4

ASSEMBLE AT THIS LEVEL

TOPCAP ASSEMBLIES:
 820-05-681-KIT: 2022 34 SC FIT4 Topcap Assy, Remote U-Cup, 2 Pos Adj, PTL
 820-05-682-KIT: 2022 34 SC FIT4 Topcap Assy, Remote U-Cup, 3 Pos Adj, PTL
 820-05-680-KIT: 2022 34 SC FIT4 Topcap Assy, Remote U-Cup, 2 Pos Adj, PTU

TORQUE:
 55±5 IN LBS

TORQUE:
 55±5 IN LBS

820-03-674-KIT
 2022 34 SC 120 Max FIT4 Damper Shaft Assy, 8mm Shaft

820-03-565-KIT
 2019 34 SC 27.5in and 29in 120 Max FIT4, Bladder Assy


Seals: O-Ring [3.0MM ID x 1.5MM CS] Metric, N-70, Static

Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Ball [Ø.1094]

GREASE:
 THIN LAYER OF
 SLICK HONEY ON BALL

ASSEMBLE THESE PARTS AFTER OIL FILL

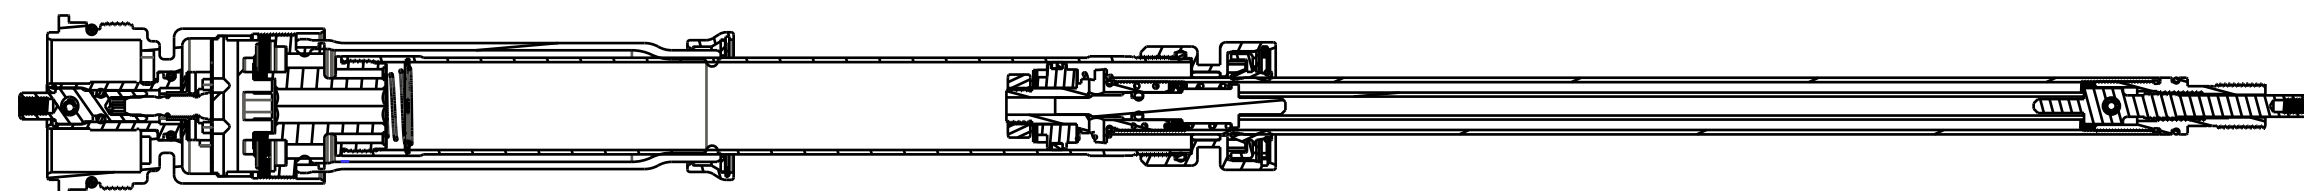

SECTION A-A
SCALE 0.750

PROPRIETARY
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**2022 34 SC 120 MAX FIT4 REMOTE
 CARTRIDGE ASSEMBLIES**

SIZE DWG. NO.

C

PLOT SCALE 1.0:1

SHEET 1 OF 1

ProE ASSEM

4

3

2

1