


4

3

2

1

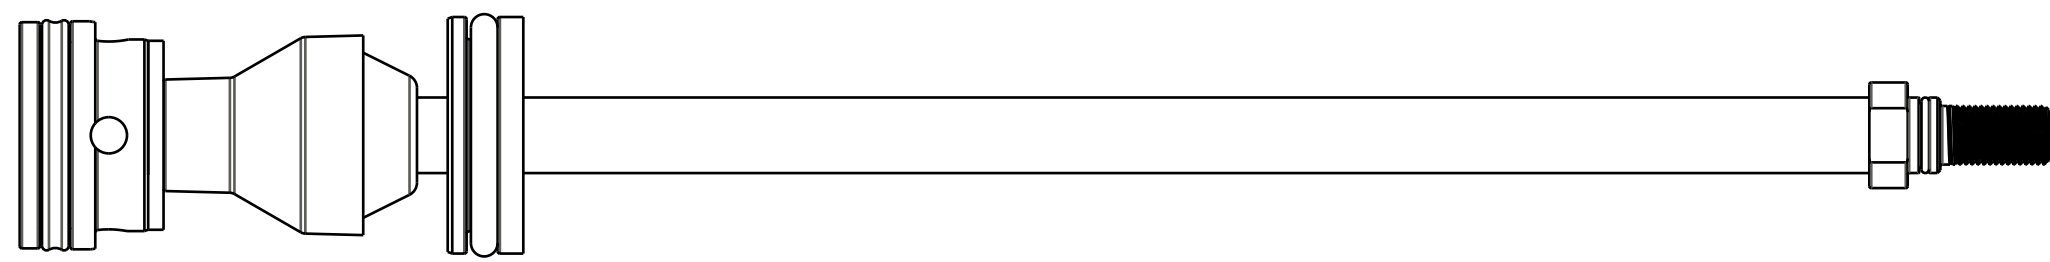

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

TORQUE:  
50±5 IN.LB.

LOCTITE:  
RED 263, 2-3 DROPS  
OR ON FEMALE THREAD

GREASE:  
THIN LAYER  
OF SLICK HONEY

820-02-617-KIT  
Neg Plate Subassembly, 2023 Rhythm 38, 1.355 Bore

IMPORTANT:  
GROOVE FACES  
PISTON

GREASE:  
THIN LAYER  
OF SLICK HONEY

Topout Bumper, 2021 38

Topout Spacer, 2023 Rhythm Air Springs, 38

SHAFT

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:  
PRESS PIN  
UNTIL CENTERED

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

Piston, FLOAT NA 2 LC, 36, 1.287 Bore

Seals: Q-Ring [(-214) .139 C.S. X 0.984 ID]

IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312  
 TITLE **2023 38mm RHYTHM E-Opt**  
**Air Shaft Assys**

SIZE DWG. NO. **C**  
 PLOT SCALE | .00 : 1 | SHEET | OF | 1  
 Pr o E ASSEM

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

Pr o E ASSEM