


4

3

2

1

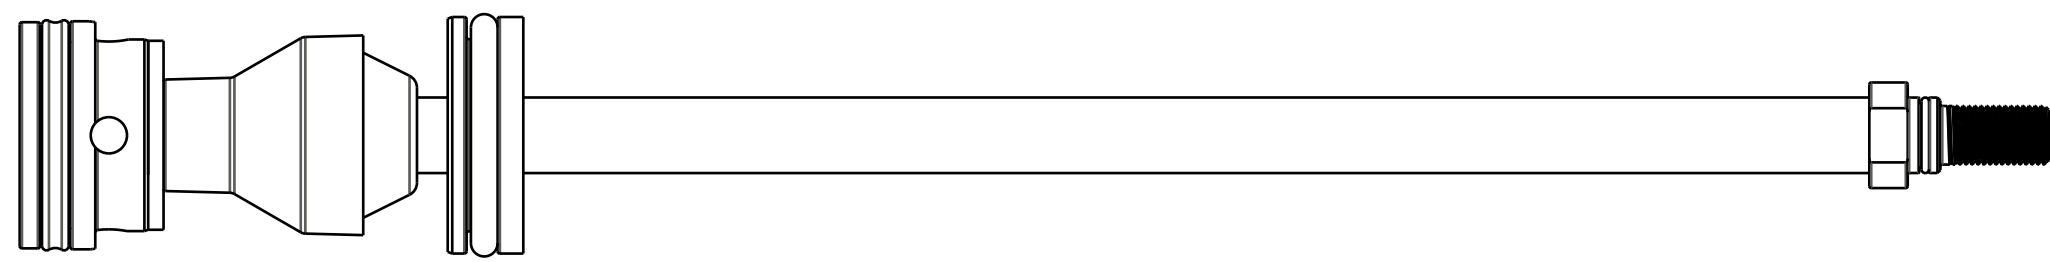

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-617-KIT
Neg Plate Subassembly, 2023 Rhythm 38, 1.355 Bore

IMPORTANT:
GROOVE FACES
PISTON

GREASE:
THIN LAYER
OF SLICK HONEY

Topout Bumper, 2021 38

Topout Spacer, 2023 Rhythm Air Springs, 38

SHAFT

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

Piston, FLOAT NA 2 LC, 38 Rhythm, 1.355 Bore

Seals: Q-Ring [(-215) .139 C.S. X 1.046 ID], TSS

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

		FOX Factory, Inc. 130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312
TITLE 2023 38mm RHYTHM Air Shaft Assys		
SIZE C	DWG. NO.	
PLOT SCALE .00 : 1		SHEET OF 1

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

Pr oE ASSEM