


4

3

2

1

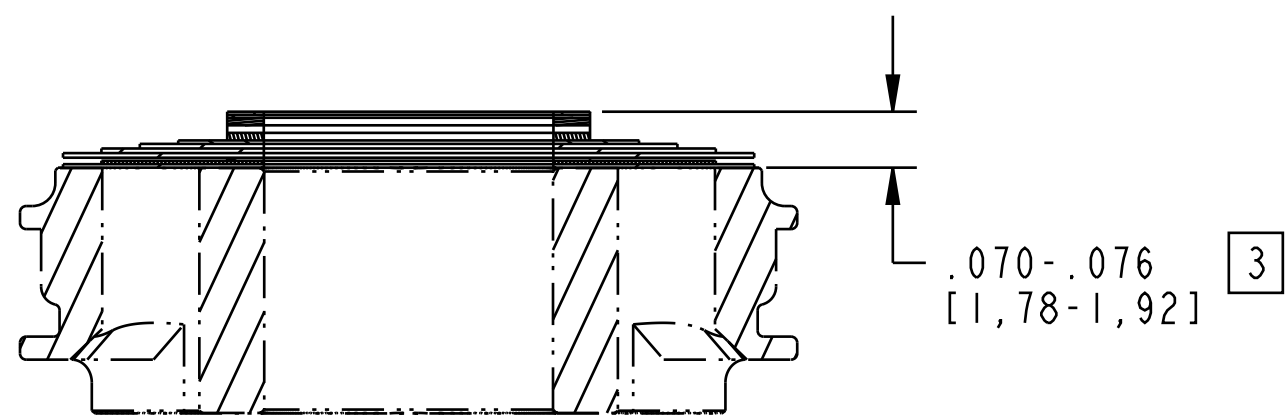

SECTION A-A
SCALE 4:1

Valve: Metric [12.0 mm OD X 9.58mm ID X 0.25mm TH]

Valve: Metric [12.0 mm OD X 9.58mm ID X 0.25mm TH]

Valve: Metric [12.0 mm OD X 9.58mm ID X 0.10mm TH]

Valve: [.600 OD X .377 ID X .0045 TH]

Valve: [.700 OD X .377 ID X .006 TH]


Valve: [.800 OD X .377 ID X .006 TH]

Valve: [.900 OD X .377 ID X .006 TH]

Valve: Metric [12.0 mm OD X 9.58mm ID X 0.10mm TH]

Valve: [.800 OD X .377 ID X .0045 TH]

Valve: [.900 OD X .377 ID X .0045 TH]

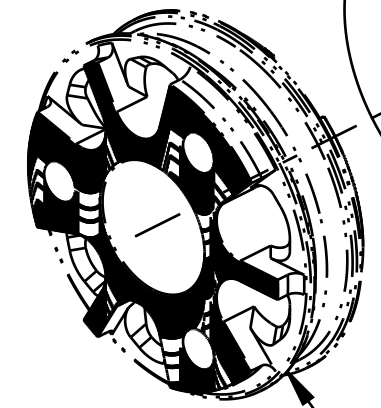

MAIN PISTON ASSY 1

IMPORTANT:
DO NOT REMOVE

MANUFACTURING NOTES:

- 1 MAIN PISTON ASSEMBLY SHOWN FOR ORIENTATION PURPOSES. NOTE PROPER ORIENTATION OF PISTON--SEE VALVING ASSEMBLY DRAWING FOR DETAILS. IMAGE SHOWN MAY NOT REPRESENT ACTUAL PART GEOMETRY.
- 2 INDICATED SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS.
- 3 DIMENSION APPLIES TO VALVE STACK AS SHOWN.

DESIGN ENGINEERING AND PRODUCT PERFORMANCE NOTES:

- 4. COMPRESSION VALVE STACK NOMINAL MINIMUM THICKNESS (NMT): .041 [1,03]

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX		FOX Factory, Inc.		Ph 831-768-1100 Fax 831-768-9312
130 Hangar Way, Watsonville, CA 95076 USA				
TITLE		Valve Stack Assy: 2022 FLOAT X & DHX, Compression, CLSS, .041 NMT		
SIZE	DWG. NO.	805-05-532-KIT		
PLOT SCALE	2:1			SHEET 1 OF 1

4

3

2

ProE ASSEM