


4

3

2

1

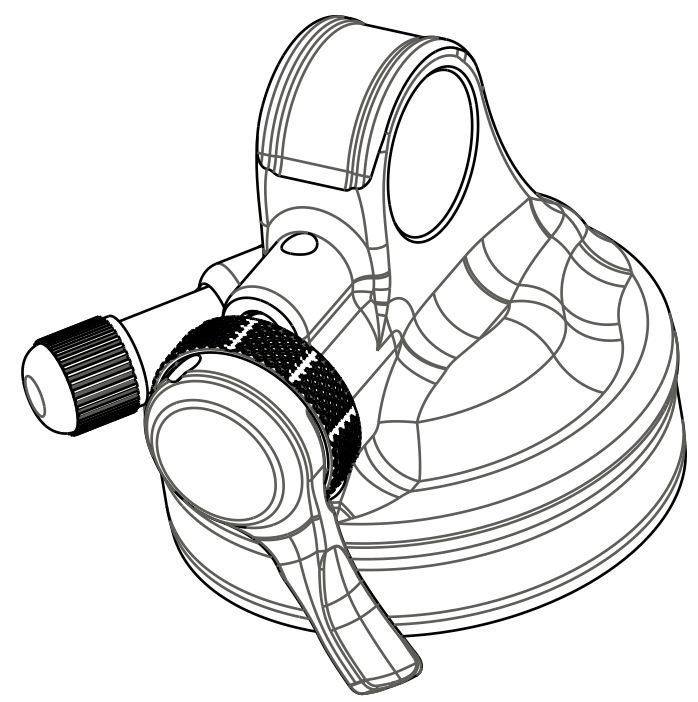

AIR VALVE O-RING

802-00-007-KIT
 Service Set: Air Valve Assy: Slim
 [M6 X .75, 1.150 TLG]

019-02-021
 Set Screw: Custom Dog Point, Radius [M3 x .5mm, .300 TLG], SS

TORQUE:
 TO CAM SHAFT
 AND BACK OFF 1/4 TURN

TORQUE:
 35±5 IN LB

EYELET

010-00-057
 Air Valve Parts: Cap, Air Valve [.305-.321], Black, 6061

Seals: O-Ring [7.5MM ID x 1.5MM CS] Metric, N-70, Static

Spring: [0.190 TLG X 0.120 OD X 25.6 lbs/in] 17-7 SS, left hand wound

039-00-264

GREASE:
 THIN LAYER
 HIGH TEMP BLUE

EYELET O-RING

010-01-000
 Ball [Ø 0.1250] Steel

TORQUE:
 5±1 IN LB

210-30-056
 Cam: CD Adj, 2016 Float DPS, 3pos

GREASE:
 THIN LAYER
 HIGH TEMP BLUE

210-30-044
 Damp Adj Part: Knob, RD Adj, 2013 FLOAT CTD Perf And Evol

210-26-070
 Damping Adjust Part: Lever, CD, 2024 Float SV, 3-Pos

019-01-018
 Socket Set Dog Point [M3 x .5mm x 6mm]

FOX Factory, Inc.
 808-17-507-KIT
 Eyelet Assy: 2024, Float SL, 3-Pos
 and
 808-17-509-KIT
 Eyelet Assy: 2024, Float SL,
 3-Pos, Trunnion

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

SIZE DWG. NO.
C
 PLOT SCALE | .50:1 | SHEET 1 OF 2

4

3

2

1

ProE ASSEM