


4

3

2

1

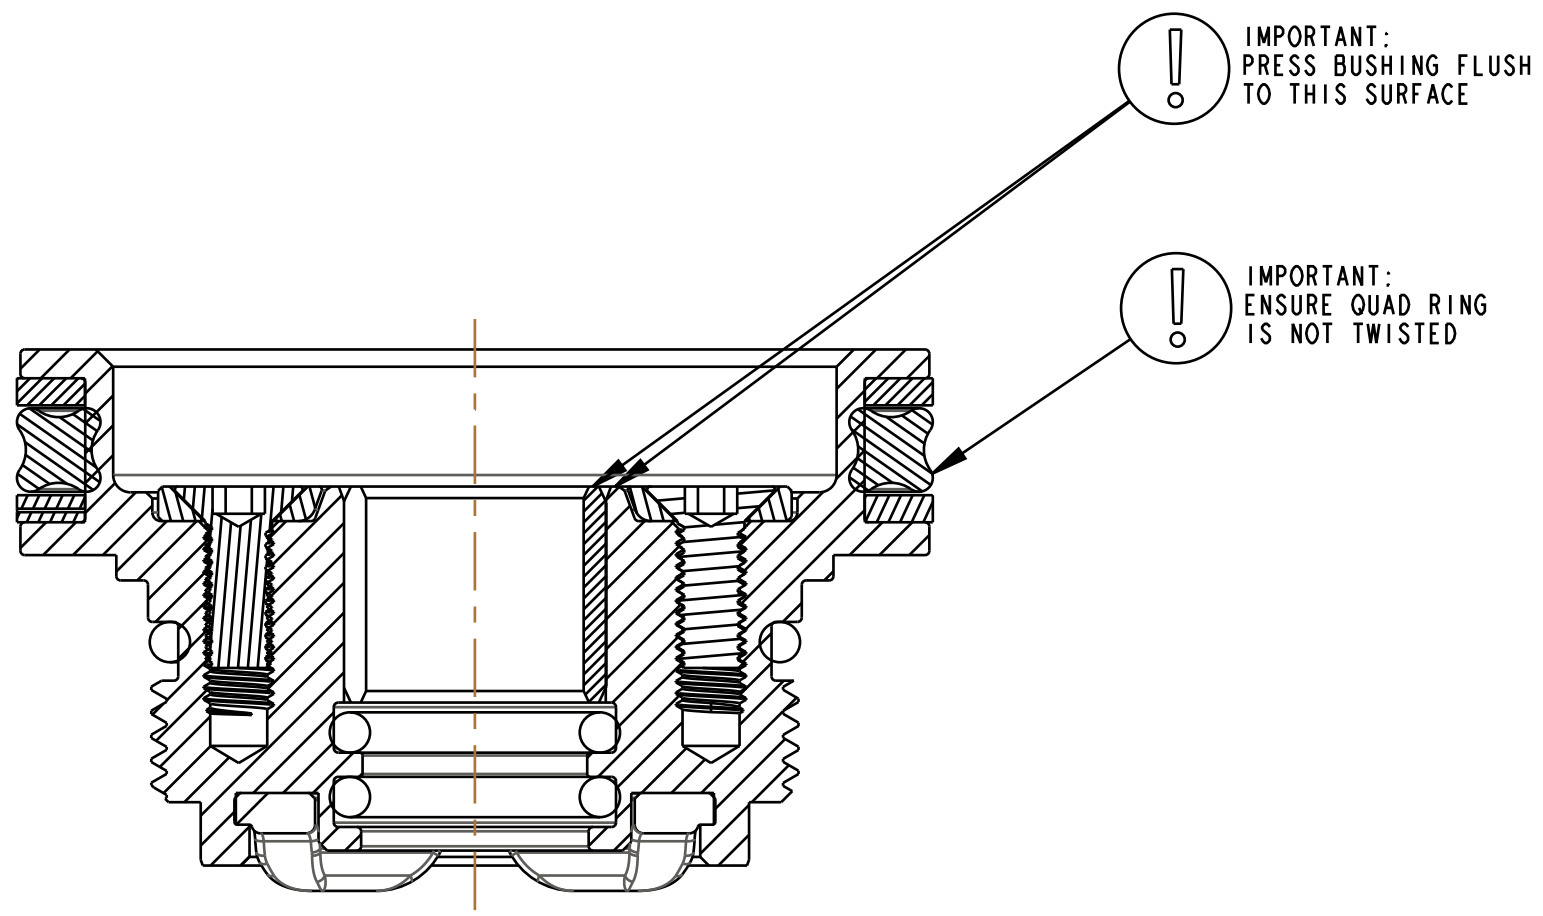

SECTION A-A
SCALE 3:1

GREASE:
THIN LAYER
OF SLICK HONEY

TORQUE:
10 ± 2 IN-LB

GREASE:
THIN LAYER
OF SLICK HONEY

GREASE:
THIN LAYER
OF SLICK HONEY

Travel Spacer Assembly

Bearing: Backup Ring, External, [Ø 1.600 Bore]

Seal, Custom, O-Ring, X2 Air Piston, LTS

Bearing: Backup Ring, External, [Ø 1.600 Bore]

Bearing: Internal [Ø.375 Shaft x .457 OD, .375 TLG]

Bearing Housing: 2024 Float X2, [1.25 Body, 1.60 Air Sleeve, Ø.375 Steel Shaft]

Seals: O-Ring [(-012) .070 C.S. X .364 ID] Standard, TSS, NBR, Dynamic

Seals: O-Ring [(-012) .070 C.S. X .364 ID] Standard, TSS, NBR, Dynamic

O-Ring [(-022) .070 C.S. X .989 ID] Dynamic

Bumper: T/O [Ø 0.375 Shaft, 0.100 TLG] Nitrile, 60A

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Bearing Assy: 2024 Float X2,
[.940 Bore, 1.600 Bore, .375 Shaft]

SIZE DWG. NO. **C** 812-06-118-KIT
PLOT SCALE 2:1 SHEET 1 OF 1

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM