


4

3

2

1

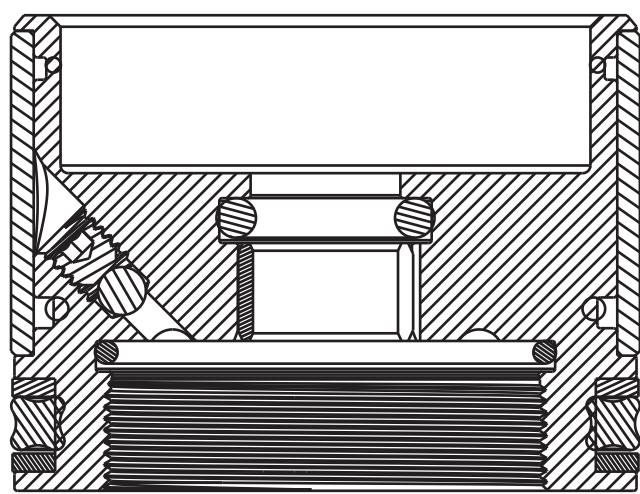

SECTION A-A

Seals: O-Ring [9.9mm ID X 2.62mm CS] Metric, N-70, Dynamic

Seals: O-Ring [35.0mm ID X 1.0mm CS] Metric, N-70, Static

018-01-034
Set Screw [#8-32 X 0.125 TLG] Flat Point, SS

010-01-000
Ball [Ø 0.1250] Steel

GREASE:
THIN LEVEL
OF SLICK HONEY

GREASE:
THIN LEVEL
OF SLICK HONEY

Bearing: (T) External [1.111 W X 1.630 OD X .047 TH, Ø1.640 Bore] TFM, Split

Seals: O-Ring [(-214) .139 C.S. X 0.984 ID]

Bearing: (T) External [1.111 W X 1.630 OD X .047 TH, Ø1.640 Bore] TFM, Split

Seals: O-Ring [27.5mm ID X 1.5mm CS] Metric, N-70, Static

Bearing: Internal [Ø.375 Shaft x .457 OD, .190 TLG]

O-Ring [(-110) 0.103 C.S. X 0.362 ID]

Bearing Housing: 2024 FLOAT, GENIE G2

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Bearing Housing Assy:
2024 FLOAT GENIE

SIZE DWG. NO.
C 812-06-117-KIT

PLOT SCALE 2:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM