

AIR VALVE O-RING

803-01-178  
Service Set: Air Valve Part: Housing, Tank Valve,  
DHX2, FloatX2, 2017 DPS

019-02-021  
Set Screw: Custom Dog Point, Radius [M3 x .5mm, .300 TLG], SS

TORQUE:  
TO CAM SHAFT  
AND BACK OFF 1/4 TURN

TORQUE:  
35±5 IN LB

EYELET

010-00-057  
Air Valve Parts: Cap, Air Valve [ .305-321], Black, 6061

Seals: O-Ring [7.5MM ID x 1.5MM CS] Metric, N-70, Static

Spring: [0.190 TLG X 0.120 OD X 25.6 lbs/in] 17-7 SS, left hand wound

039-00-264

GREASE:  
THIN LAYER  
HIGH TEMP BLUE


EYELET O-RING

010-01-000  
Ball [Ø 0.1250] Steel

TORQUE:  
5±1 IN LB

210-30-261  
Cam: CD Adj, 2025 Rhythm/Bomber Inline, Float DPS, 2pos

GREASE:  
THIN LAYER  
HIGH TEMP BLUE

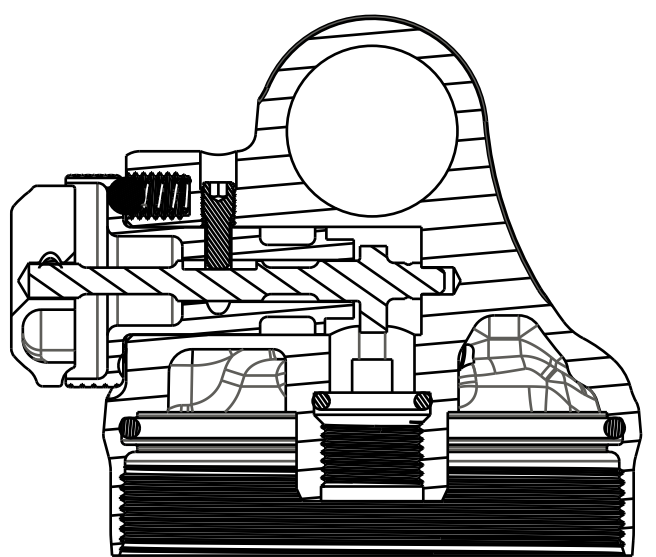

SECTION A-A

210-30-044  
Damp Adj Part: Knob, RD Adj, 2013 FLOAT CTD Perf And Evol

019-01-018  
Socket Set Dog Point [M3 x .5mm x 6mm]

210-15-087  
Damp Adj Part: Lever, CD Adj, 2025 Bomber Inline, P-S DPS, Gray

NOTES:

[1] APPLY A THIN LAYER OF SLICK HONEY TO INSTALL ON AIR VALVE.  
APPLY A THNIN LAYER OF FLOAT FLUID ON INSTALLED AIR VALVE  
O-RING PRIOR TO AIR VALVE INSTALLATION.

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		<b>FOX Factory, Inc.</b>		Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA		Fox 831-768-9312		
TITLE		Eyelet Assy: 2025, BOMBER LV, 2-pos, Trunnion		
SIZE	DWG. NO.	808-17-660-KIT		
C				
PLOT SCALE   .50 : 1		SHEET 1 OF 2		