

AIR VALVE O-RING

019-02-021
Set Screw: Custom Dog Point, Radius [M3 x .5mm, .300 TLG], SS

802-00-007-KIT
Air Valve Assy: Slim[M6 X .75, 1.150 TLG]

TORQUE:
35±5 IN LB

TORQUE:
TO CAM SHAFT
AND BACK OFF 1/4 TURN

EYELET

010-00-057
Air Valve Parts: Cap, Air Valve [.305-32], Black, 6061

Seals: O-Ring [7.5MM ID x 1.5MM CS] Metric, N-70, Static

Spring: [0.190 TLG X 0.120 OD X 25.6 lbs/in] 17-7 SS, left hand wound

039-00-264

GREASE:
THIN LAYER
HIGH TEMP BLUE


EYELET O-RING

010-01-000
Ball [Ø 0.1250] Steel

TORQUE:
5±1 IN LB

210-30-056
Cam: CD Adj, 2016 Float DPS, 3pos

GREASE:
THIN LAYER
HIGH TEMP BLUE

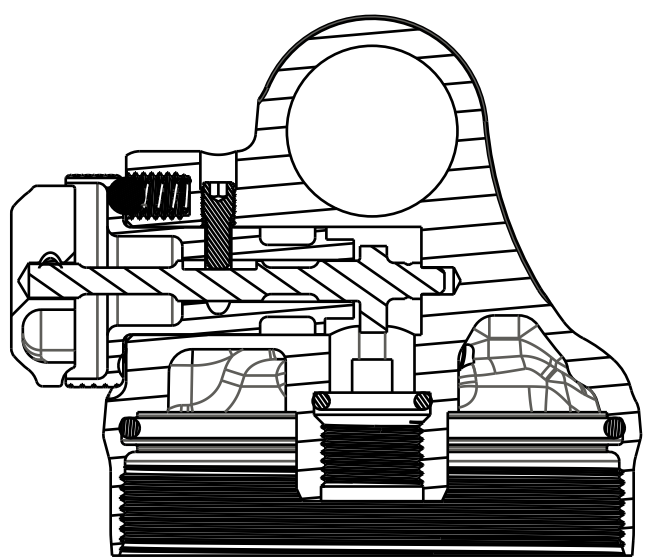

SECTION A-A

210-30-044
Damp Adj Part: Knob, RD Adj, 2013 FLOAT CTD Perf And Evol

019-01-018
Socket Set Dog Point [M3 x .5mm x 6mm]

210-26-070
Damping Adjust Part: Lever, CD, 2024 Float SV, 3-Pos

NOTES:

1 APPLY A THIN LAYER OF SLICK HONEY TO INSTALL ON AIR VALVE.
APPLY A THNIN LAYER OF FLOAT FLUID ON INSTALLED AIR VALVE
O-RING PRIOR TO AIR VALVE INSTALLATION.

PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Eyelet Assy: 2025, Rhythm LV, 2-pos

SIZE DWG. NO. **C** 808-17-655-KIT

PLOT SCALE | .50:1 | SHEET 1 OF 2