

803-01-178
Service Set: Air Valve Part: Housing,
Tank Valve, DHX2, FloatX2, 2017 DPS

010-00-057
Air Valve Parts: Cap, Air Valve [.305-.32], Black, 6061

039-00-264
Spring: [0.190 TLG X 0.120 OD X 25.6 lbs/in] 17-7 SS, left hand wound

010-01-000
Ball [Ø 0.1250] Steel

210-03-448
Damp Adj Part: Knob, RD Adj, MY25 Rhythm/Bomber Inline

AIR VALVE O-RING

019-02-021
Set Screw: Custom Dog Point, Radius [M3 x .5mm, .300 TLG], SS

TORQUE:
TO CAM SHAFT
AND BACK OFF 1/4 TURN

TORQUE:
35±5 IN LB


EYELET

Seals: O-Ring [7.5MM ID x 1.5MM CS] Metric, N-70, Static

GREASE:
THIN LAYER
HIGH TEMP BLUE

EYELET O-RING

GREASE:
THIN LAYER
HIGH TEMP BLUE

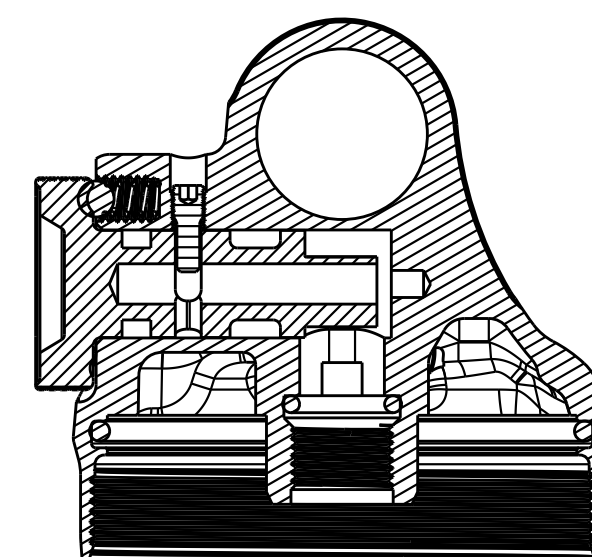

SECTION A-A

NOTES:

- 1 APPLY A THIN LAYER OF SLICK HONEY TO INSTALL ON AIR VALVE. APPLY A THIN LAYER OF FLOAT FLUID ON INSTALLED AIR VALVE O-RING PRIOR TO AIR VALVE INSTALLATION.

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE Eyelet Assy: 2025,
Rhythm/Bomber LV, R-Adj, Trunnion

SIZE DWG. NO. 808-17-664-KIT

PLOT SCALE 1.5:1 SHEET 1 OF 2