


STACK HEIGHT *

.0105 GAP
[0,267]

SECTION A-A
SCALE 6:1

STATE	STACK HEIGHT	MIN. STACK HEIGHT	MAX. STACK HEIGHT
FREE	.0875 [2,223]	.0855 [2,172]	.0895 [2,273]
INSTALLED	.077 [1,96]	.075 [1,91]	.079 [2,01]

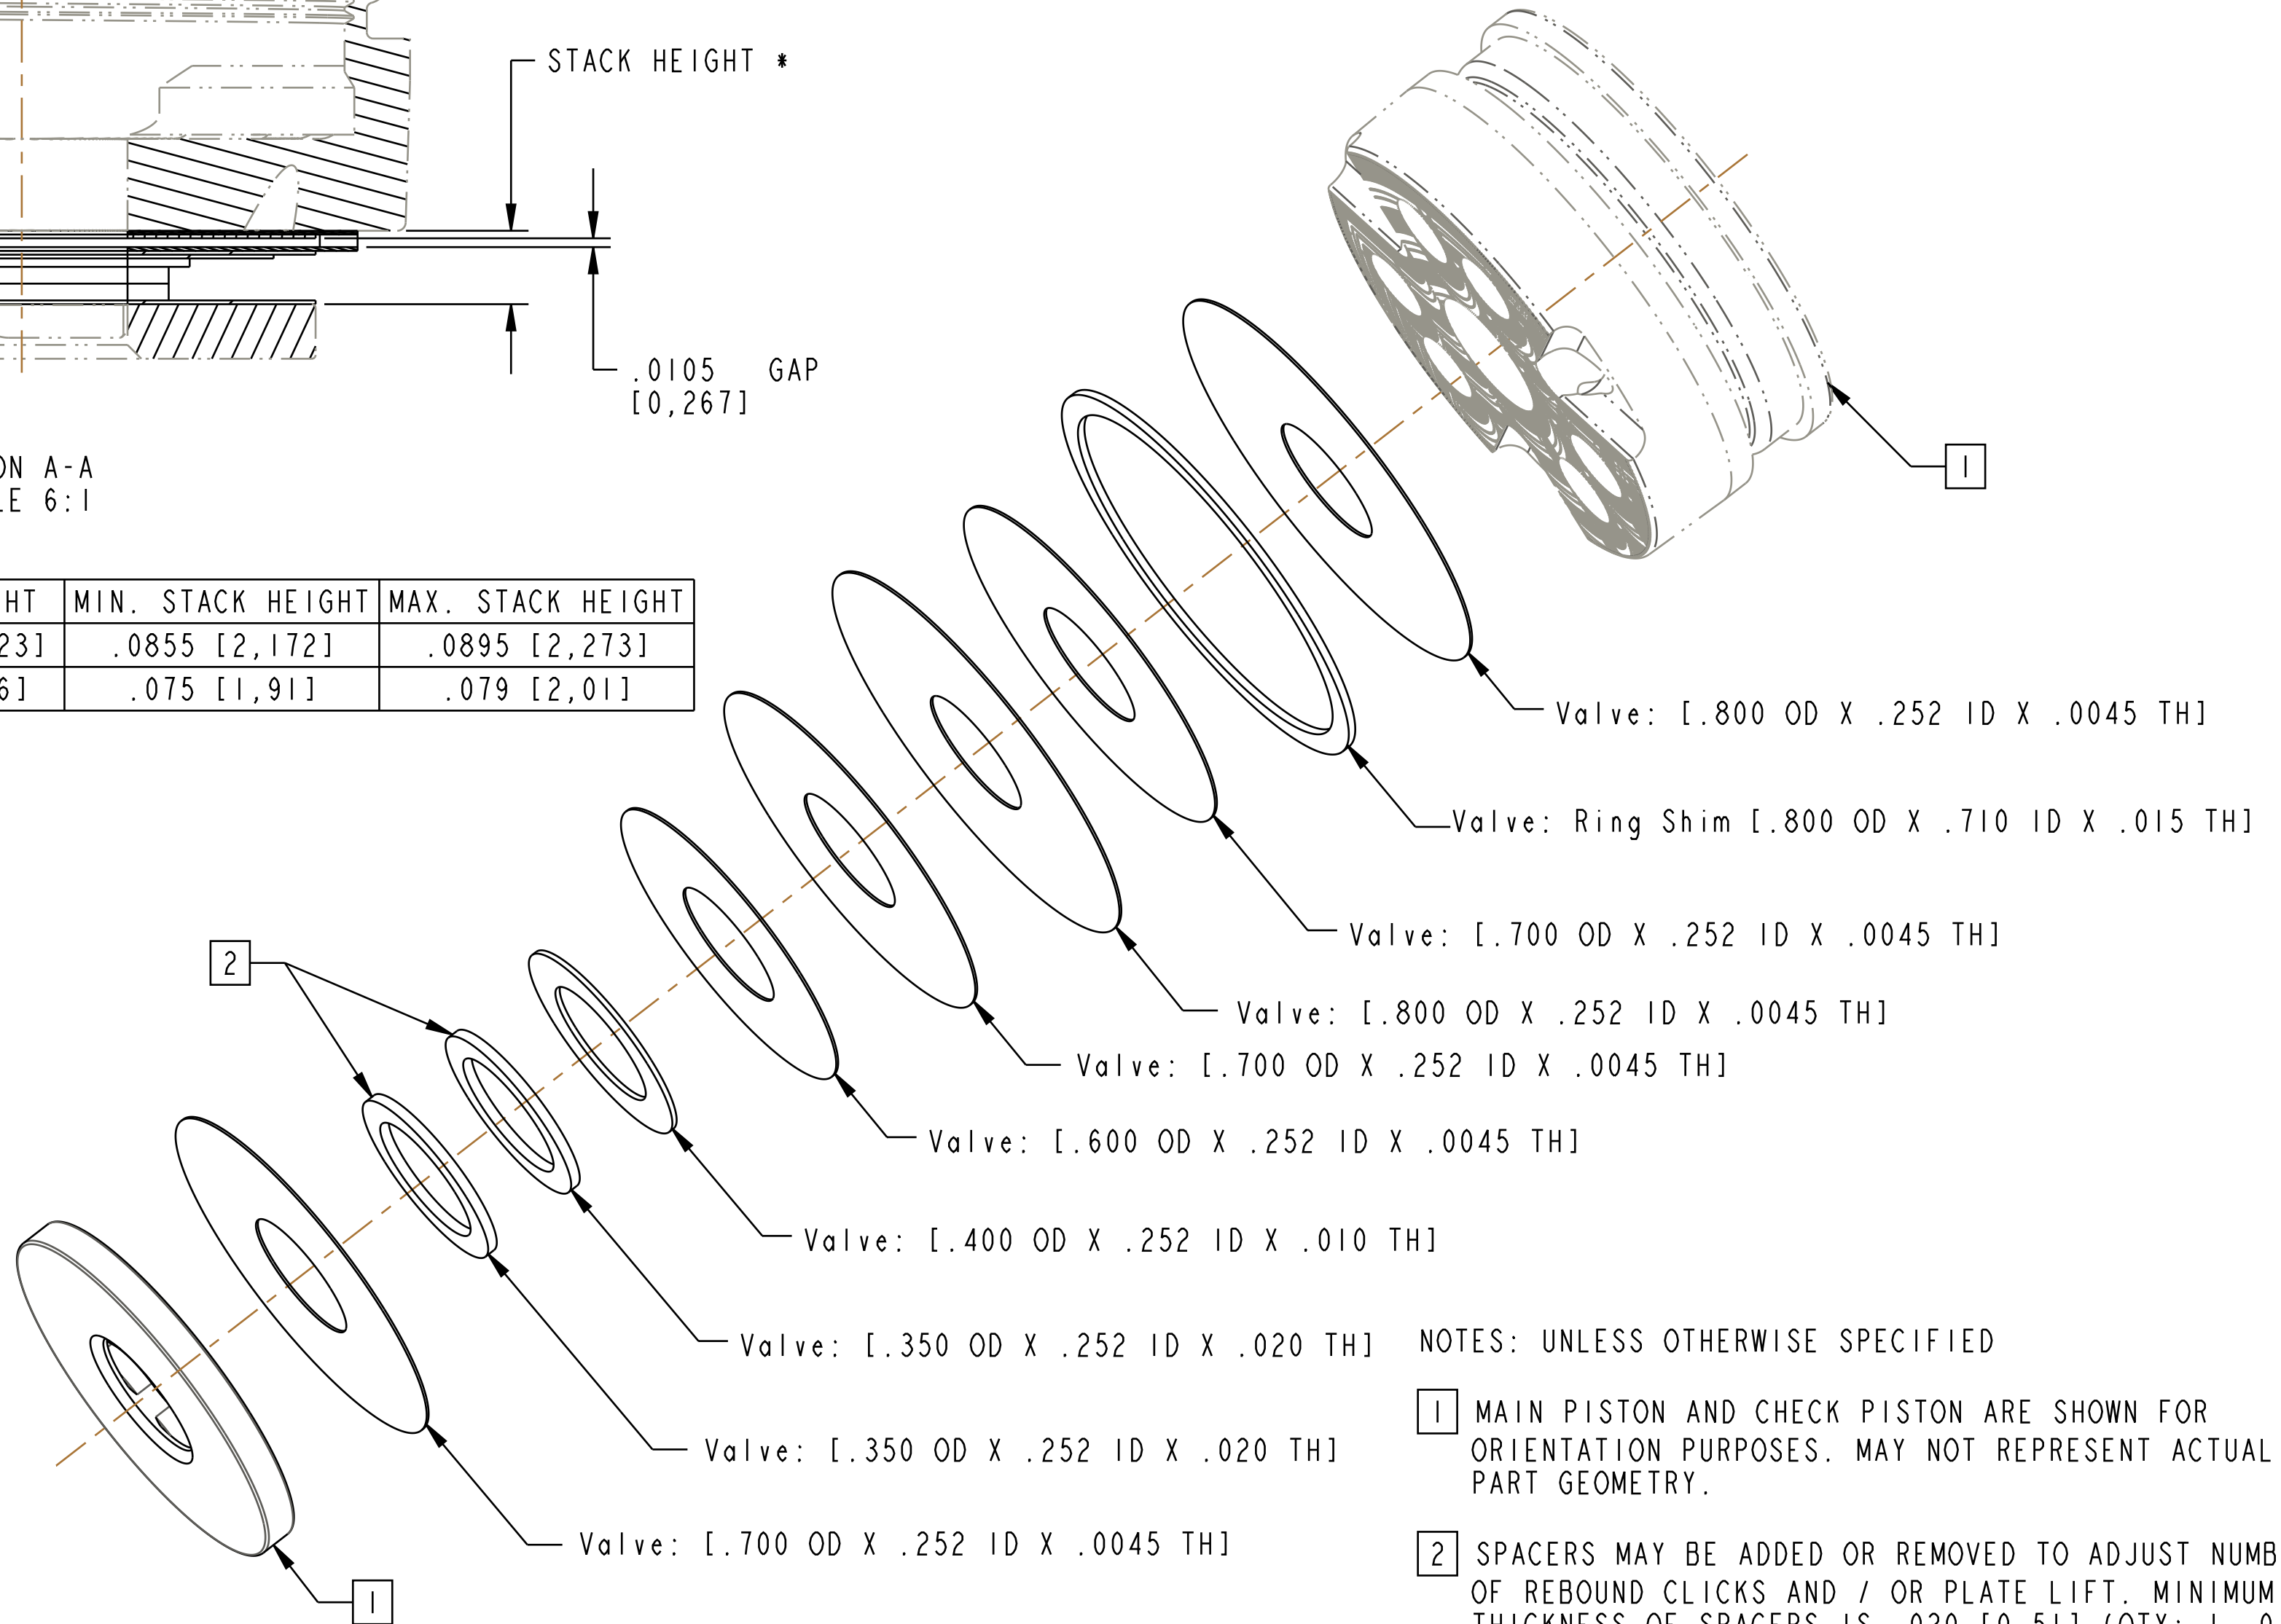

NOTES: UNLESS OTHERWISE SPECIFIED

1 MAIN PISTON AND CHECK PISTON ARE SHOWN FOR ORIENTATION PURPOSES. MAY NOT REPRESENT ACTUAL PART GEOMETRY.

2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS AND / OR PLATE LIFT. MINIMUM THICKNESS OF SPACERS IS .020 [0,51] (QTY: 1, 044-20-035).

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Valve Stack Assy: 2024 Float SL
[.940 Bore], Compression, BC002

SIZE DWG. NO. 805-05-690-KIT
C
PLOT SCALE 4:1 SHEET 1 OF 1