


4

3

2

1

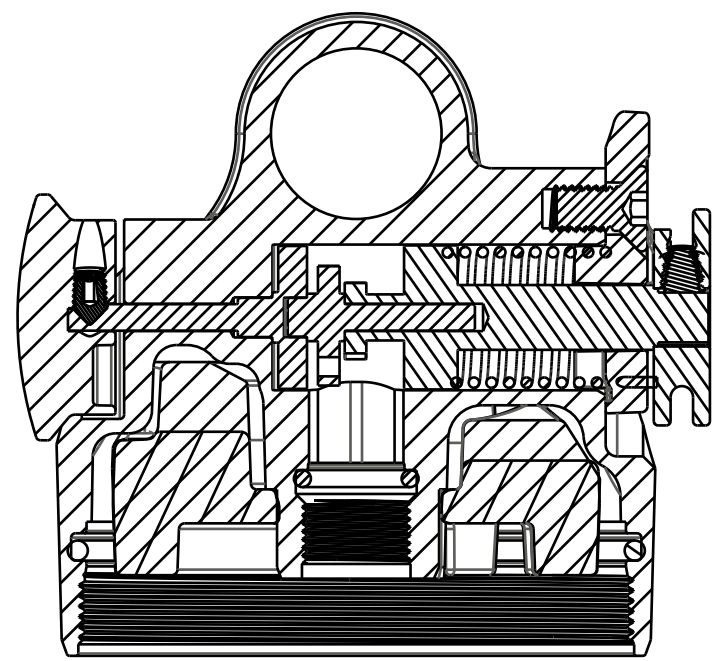

SECTION A-A

019-01-006
Fastener, Standard (Metric): Screw [M3 x 4mm] SS Socket Set Cone Point

010-01-000
Ball [Ø 0.1250] Steel

039-00-264
Spring: [0.190 TLG X 0.120 OD X 25.6 lbs/in] 17-7 SS, left hand wound

019-01-140
Fastener: Custom (Metric): Socket Set Screw [M4 x .7mm x 3mm], SST, Patchlock

TORQUE:
6±1 IN-LB, THEN CCW 1 TURN
VERIFY REB DETENT FUNCTION

039-00-726
Spring: Torsion, 2024 Float LV Remote,
[.0071 in-lb/deg], PTL, Plated

210-26-196
Cam: RD Adj, 2024 Float, Remote, Reb Reverse, Gen2

019-01-070
Fastener: Standard (Metric) Set Screw
[M4 x .7mm x 4mm] Flat Point, SS

210-26-004
Cable Hanger, 2024 Float LV, 2-Pos Up

GREASE:
HEAVY LEVEL
OF HI TEMP BLUE

TORQUE:
25±3 IN-LB

GREASE:
CLUMP LEVEL
OF HI TEMP BLUE

210-26-198
Gear, Detent, Rebound 2024 Float, Reb Reverse, Gen2
019-01-129
SCREW [M4 X 10] FHCS, BLACK ZINC, PATCHLOCK

TORQUE:
8±2 IN-LB

Set Screw [M4 x .7mm x 4mm], Flat Point, Torx, Black

Seals: O-Ring [8mm ID X 1.5mm CS] Metric, N-70, Static

210-24-054
Pulley: 2016 Nude 3 DPS-Remote

TORQUE:
START THREAD 2 TURNS

GREASE:
THIN LAYER
OF SLICK HONEY

210-26-211
Rebound Knob: 2024 Float

019-01-070
Set Screw [M4 x .7mm x 4mm], Flat Point, SS

Seals: O-Ring [(−032) .070 C.S. X 1.864 ID] Standard N674-70, Dynamic

010-00-005
Air Valve Parts: Core, Eaton, Low pressure

010-00-057
Air Valve Parts: Cap, Air Valve [.305-32], Black, 6061

3 PULLEY TO BE FULLY SEATED AGAINST COMPRESSION CAM FLANGE.

4 BLACK TORX SET SCREW FIXES PULLEY TO CAM.

5 STAINLESS HEX SET SCREW FIXES CABLE TO PULLEY.

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**Eyelet Assy: 2024, Float, PTL,
2-Pos, Remote Up, Reb Rev**

SIZE DWG. NO. **808-17-540-KIT**

PLOT SCALE 1.5:1

SHEET 1 OF 2

4

3

2

ProE ASSEM