


4


3

2

1

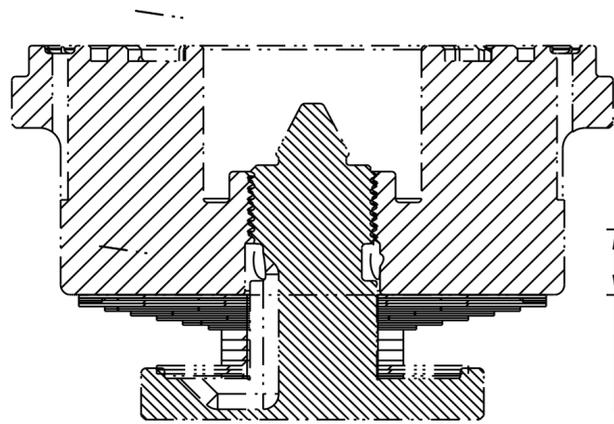

0.021-0.024 INSTALLED STACK HEIGHT [2]
[0.55-0.59]
0.025-0.027 FREE STACK HEIGHT [3]
[0.63-0.69]

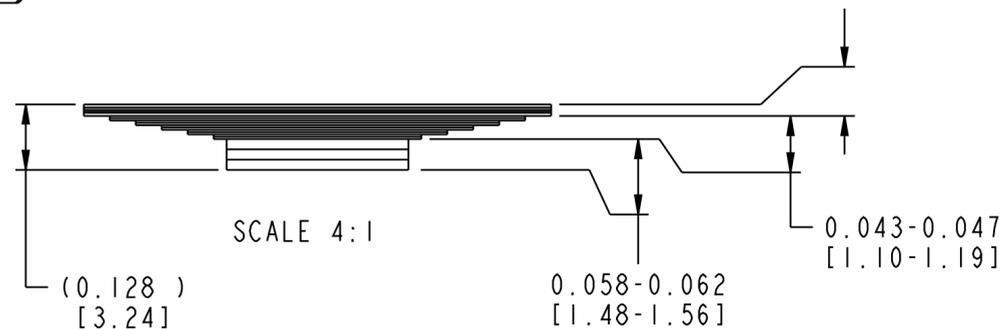

Valve: [.900 OD X .252 ID X .006 TH]

Valve: [.800 OD X .252 ID X .0045 TH]

Valve: Ring Shim [.900 OD X .810 ID X .008 TH]

Valve: [.700 OD X .252 ID X .0045 TH]

Valve: [.600 OD X .252 ID X .0045 TH]

Valve: [.500 OD X .252 ID X .0045 TH]

Valve: [.400 OD X .252 ID X 0.0045 TH]

Valve: [.350 OD X .252 ID X .020 TH]

Valve: [.900 OD X .252 ID X .006 TH]

Valve: [.800 OD X .252 ID X .0045 TH]


Valve: [.700 OD X .252 ID X .0045 TH]

Valve: [.600 OD X .252 ID X .0045 TH]

Valve: [.500 OD X .252 ID X .0045 TH]

Valve: [.400 OD X .252 ID X 0.0045 TH]

Valve: [.350 OD X .252 ID X .020 TH]

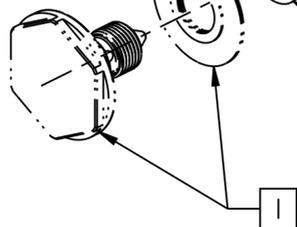

NOTES: UNLESS OTHERWISE SPECIFIED

[1] BASE VALVE, BOLT AND LEVER MODE VALVE STACK ASSY SHOWN FOR REFERENCE PURPOSES.

[2] FREE STATE REQUIRES MEASUREMENT WITH MINIMAL FORCE APPLIED FROM THE MEASUREMENT DEVICE. WHEN A RING SHIM IS PRESENT, THE MEASUREMENT DEVICE MUST SPAN BOTH SIDES OF THE RING SHIM.

[3] INSTALLED STATE REQUIRES COMPRESSING THE VALVE STACK TO SOLID HEIGHT USING COMPRESSION INTERFACES THAT ARE NO LARGER IN DIAMETER THAN THE MINIMUM VALVE DIAMETER.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Valve Stack Assy: 2025 FLOAT X & DHX, B20, Base Valve Compression, Flat Piston

SIZE DWG. NO. **805-05-238-KIT**
C
PLOT SCALE 1.6:1 SHEET 1 OF 1

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM