

D

C

B



A

D

C

B

A

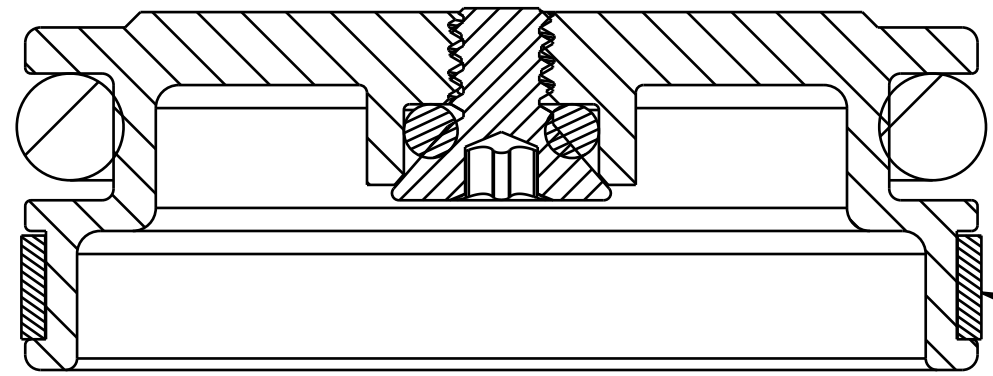

IMPORTANT:
GLIDE BAND MUST SLIDE FREELY
IN RESERVOIR

SECTION A-A



GREASE:
THIN LAYER
OF SLICK HONEY



GREASE:
THIN LAYER
OF SLICK HONEY

O-Ring [(-214) .139 C.S. X 1.00 ID]

Piston, Floating, IFP, 2026 FLOAT X2 & DHX2

Bearing: External [0.135 W X 1.250 OD X 0.031 TH, Ø 1.250 Bore] PTFE, Ring, 2026

O-Ring (-006) [1.070 C.S. X .114 ID]

Screw [#6-32 X 0.250 TLG], Black Oxide, Torx



TORQUE:
7±1 IN.LB.

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX		FOX Factory, Inc.		Ph 831-768-1100	
		130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312	
TITLE Piston Assembly: 2026 FLOAT X2 & DHX2, IFP, Floating w/ Bleed & Glide Band, 31.75 mm Bore					
SIZE C	DWG. NO. 805-00-146-KIT				
PLOT SCALE 4:1				SHEET 1 OF 1	