

8

7

6

5

4



3

2

1

— PROPRIETARY —

THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

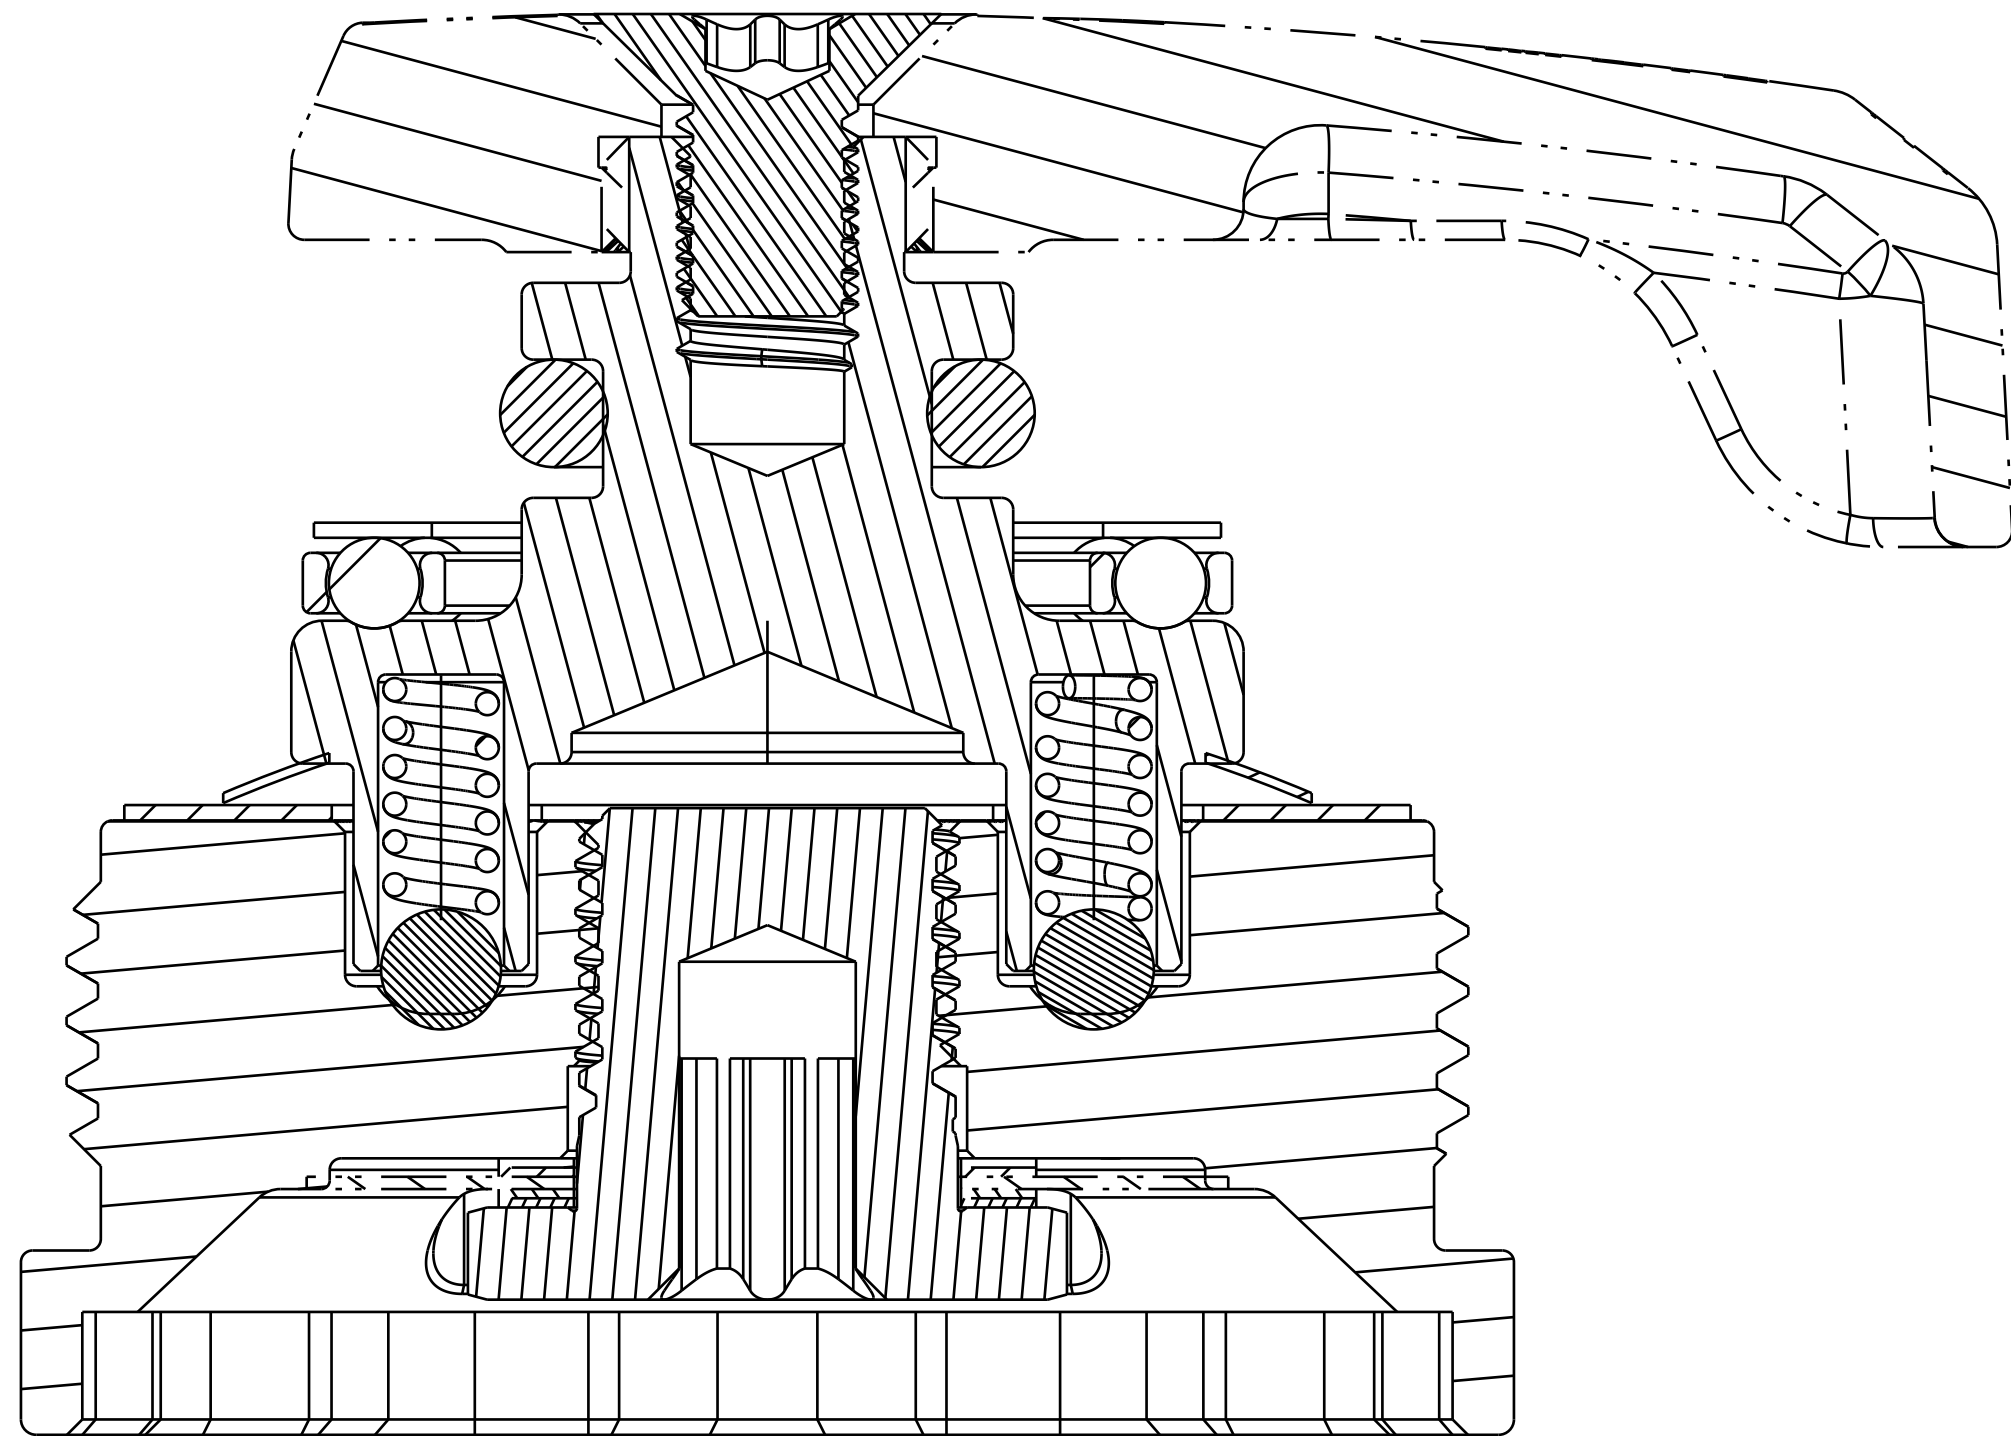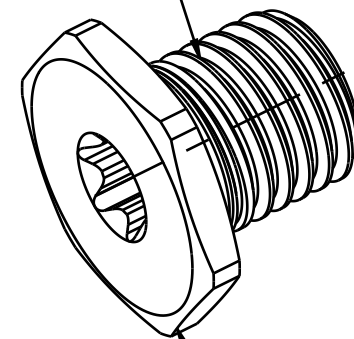SECTION A-A
SCALE 8:1TORQUE:
60±5
IN-LBF

FIRM MODE VALVE NOT INCLUDED (ORDER SEPARATELY)

Firm Mode Adjust Piston Bolt, 2026 FLOAT X2 & DHX2

Piston: Resi Firm Mode, 2026 FLOAT X2 & DHX2

TORQUE:
160±5
IN-LBF

Firm Mode Adjust Butterfly Valve, 2026 FLOAT X2 & DHX2

Spring, Washer, Firm Mode Adjust Check, 2026 FLOAT X2 & DHX2

010-01-004
Ball [Ø 0.078] Steel

Spring: Detent, 2026 DHX2 & FLOAT X2, Firm Mode Lever, 13.2 N/mm

Firm Mode Adjust Shaft, 2026 FLOAT X2 & DHX2

Thrust Bearing, Lockout, 2026 FLOAT X2 & DHX2

Valve: Metric [11.1mm ID X 15.0mm OD X 0.25mm TH]

O-Ring (-009) [1.070 C.S. X .208 ID]



FIRM MODE LEVER NOT INCLUDED (ORDER SEPARATELY)

LOCTITE:
BLUE 243
TWO DROPS
TORQUE:
7±2
IN-LBF

FHCS, M3x0.5 x 5MM, Torx, Black Zinc

GREASE:
THIN LAYER
OF SLICK HONEYGREASE:
THIN LAYER
OF SLICK HONEYIMPORTANT:
NOTE PROPER
ORIENTATION

(010-01-004)

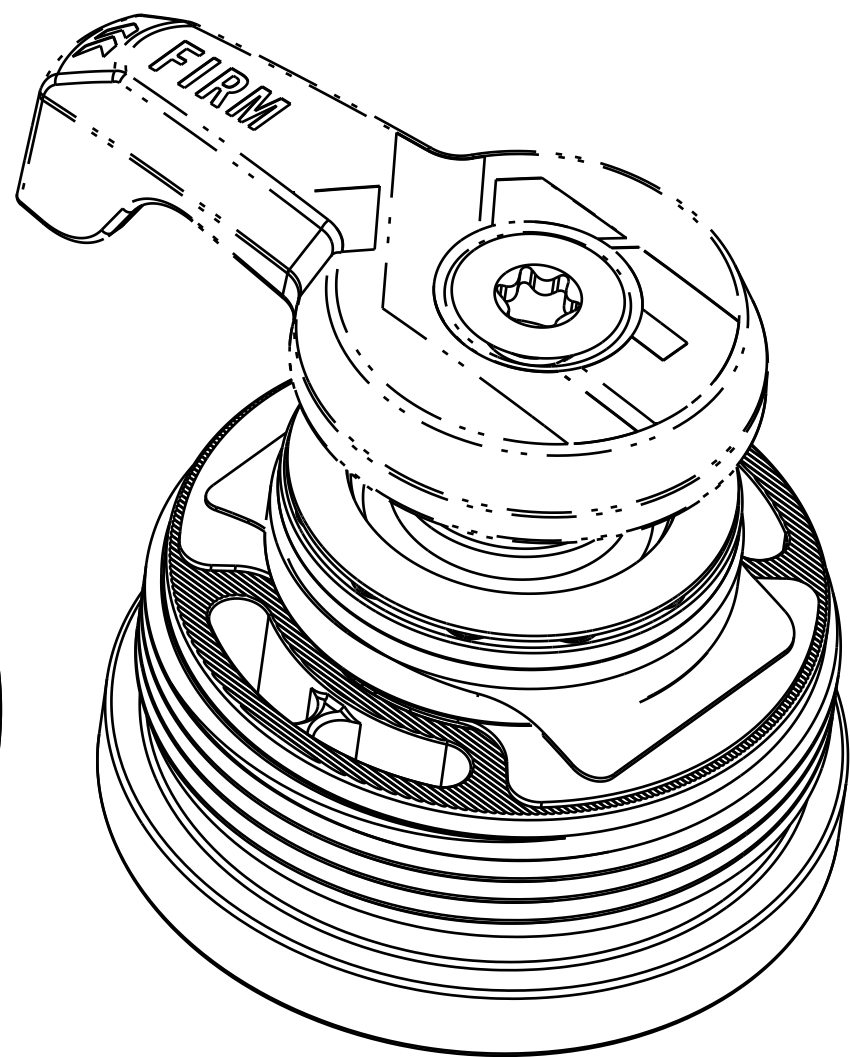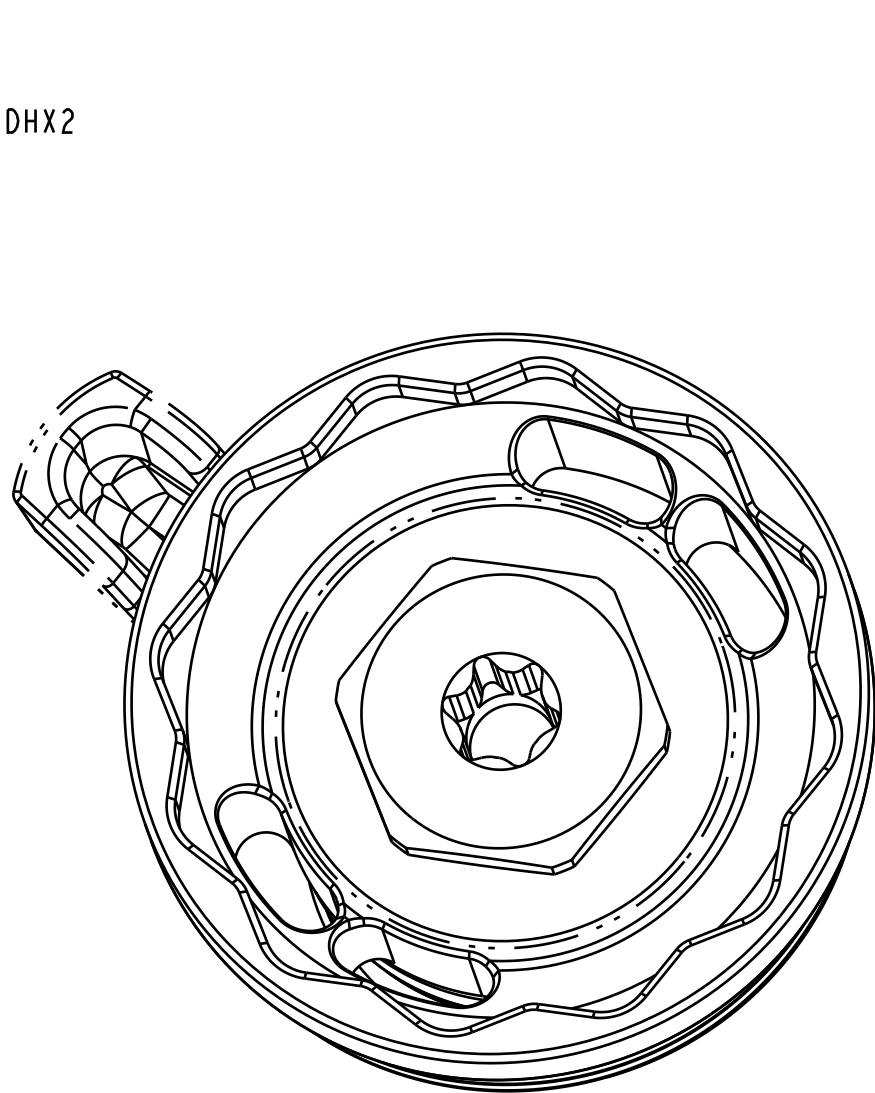

FOX Factory, Inc.

2055 Sugarloaf Circle, Suite 300
Duluth, Ga 30097 USA Phone 800-369-7469

TITLE

Eyelet Sub Assy: Lever,
2pos, 2026 FLOAT X2 & DHX2

SIZE

D

DWG. NO.

808-17-614-KIT

REV

A

PLOT SCALE: 4:1

SHEET: 1 OF 1