


4

3

2

1

— PROPRIETARY —
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

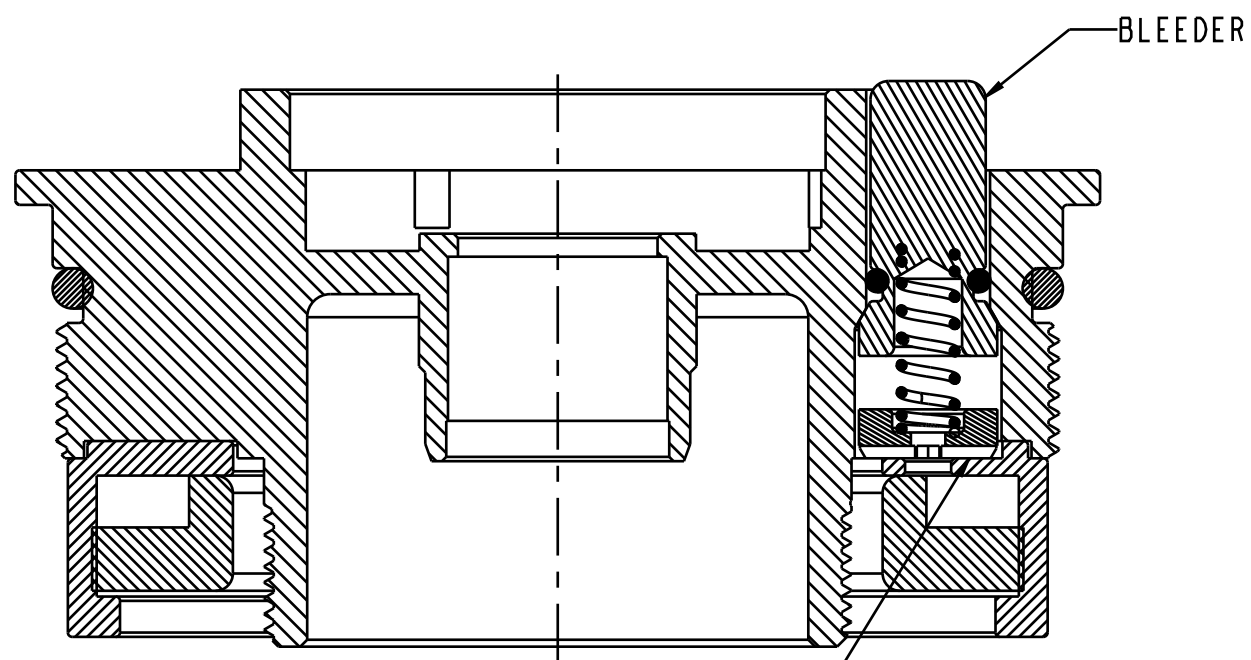

IMPORTANT:
CUT-OUT IS ASSEMBLED
ALIGNED TO BLEEDER

Fastener: Standard (Metric): Screw
[M2.5 x .45 x 5mm] Flat Head Screw, SS

NOTE CUT-OUT IN PART.

GREASE:
THIN LAYER
OF SLICK HONEY

TORQUE:
2.5 ± .5
IN-LB

LOCTITE:
1-2 DROPS
243 BLUE

Bumper: Bottom-Out, PODIUM

Fastener: Standard (Metric): Screw [M2.5 x .45 x 5mm] Flat Head Screw, SS

Fastener, Custom: Carrier, B/O Bumper, Air Side, PODIUM

Pressure Release Cap, PODIUM

Spring, Comp., [0.109 OD x 0.075 ID x 0.340 TLG], 21 lb/in, 2014.5 40 Air Bleed

Pressure Release Button, PODIUM

Seals: O-Ring [3.5MM ID x 1.0MM CS] Metric, N-70, Static

O-RING

TOPCAP

		FOX Factory, Inc. 2055 Sugarloaf Circle, Suite 300 Duluth, Ga 30097 USA Phone 800-369-7469	
TITLE Topcap Bleeder Assy: 2026 Podium Grip X2			
SIZE C	DWG. NO. 820-05-822-KIT	REV A	
PLOT SCALE: 1.75:1		SHEET: 1 OF 1	

4

3

2

1