
ALIGN 3X FEATURES WITH FLATS OR PEAK OF TOPCAP

ENGAGE 2X FEATURES

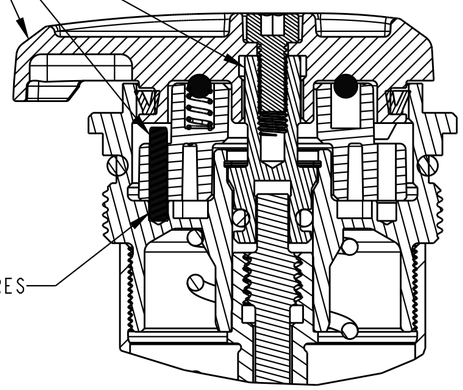

SECTION A-A
SCALE 2.500

Fastener, Custom: Cover, Nut, Rhythm 36

Seals: O-Ring [15mm ID x 1.5mm CS] Metric, N-70, Static

241-00-022
Fastener, Custom: Nut, Bottom, 011

820-05-377-KIT
2016 FIT4 Bottom Stud Interface Parts 36, 38 and 40

241-01-011
Fastener, Custom: Crush Washer, Plastic, 13mm


TORQUE:
110 ±5in-lb

Knob, Rebound, 2011 36_40

Fastener, Standard: Screw [#8-32 X 0.250 TLG] 303 SS, Socket Set Half Dog Point

TORQUE:
8.0±0.5 in-lb

LOCTITE:
BLUE 243
ONE DROP

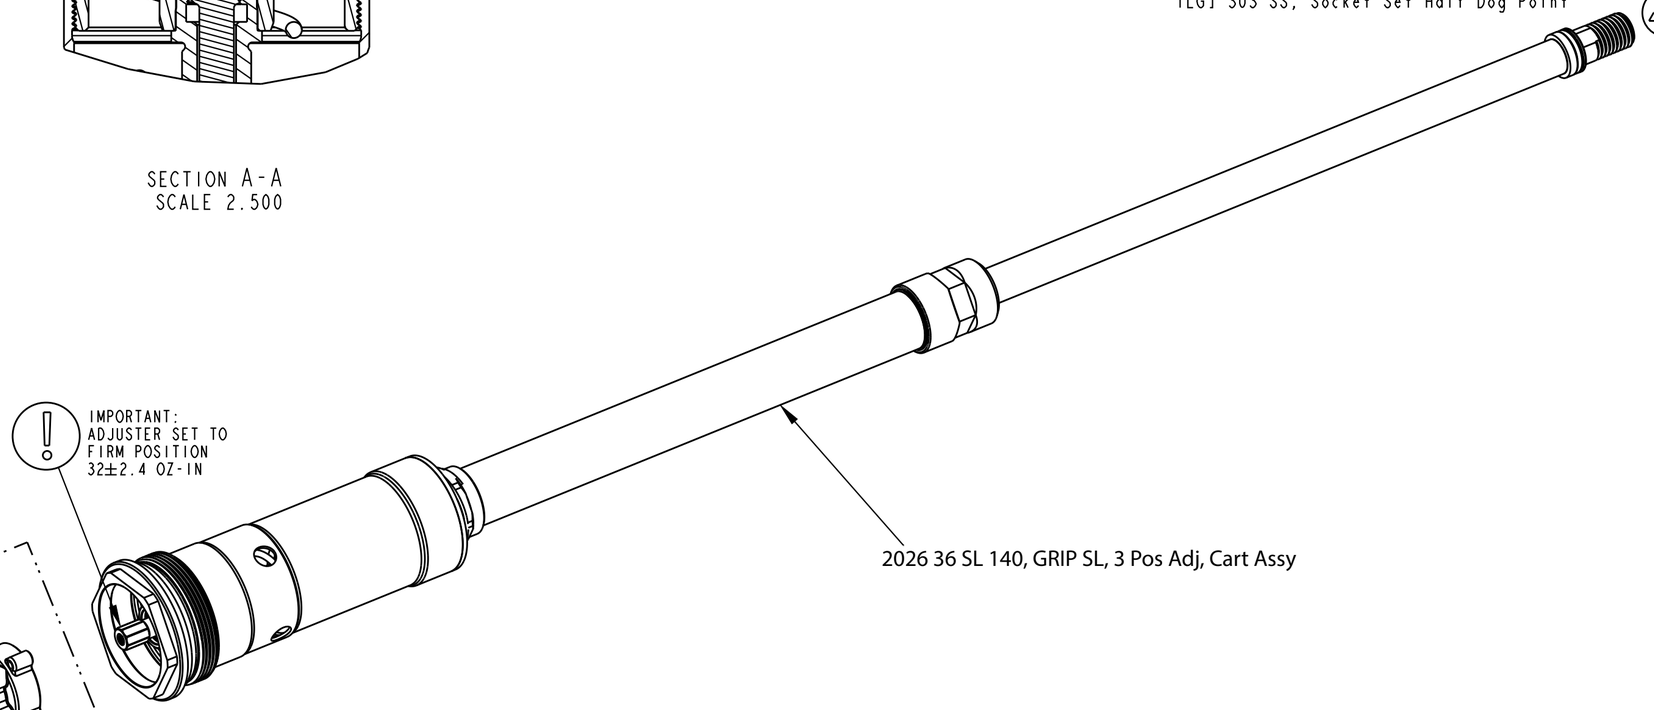

2026 36 SL 140, GRIP SL, 3 Pos Adj, Cart Assy

Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

IMPORTANT:
ADJUSTER SET TO
FIRM POSITION
32±2.4 OZ-IN

Air Valve Parts: Ball [2.0mm OD], Grade 25 Steel, Chrome Plated

GREASE:
THIN LAYER
OF SLICK HONEY

TORQUE:
4±1 IN LBS

820-05-731-KIT
2025 GRIP-SL Topcap Interface Parts, Blue Ano

Damper Adjust Part: Detent, Molded, 2025 GRIP SL

Pin: Dowel [1.5mm OD x 8mm TLG] SST

Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Air Valve Parts: Ball [2.0mm OD], Grade 25 Steel, Chrome Plated

Seals: U-Cup, Shore 70A, 2013 Fit-CTD and CTD-ADJ

Knob, Lockout Selector, 2025 GRIP SL

Fastener Standard (Metric): Screw, Socket Head, M2.5 X 6

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc.
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100
Fax 831-768-9312

TITLE
2026 36 SL 140, GRIP SL,
3 Pos Adj, Cart Assy Complete

SIZE C | DWG. NO. 820-18-635-KIT

PLOT SCALE 1:1 | SHEET 1 OF 2