
— PROPRIETARY —
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

AIR PISTON BEARING ORIENTATION: DEFAULT

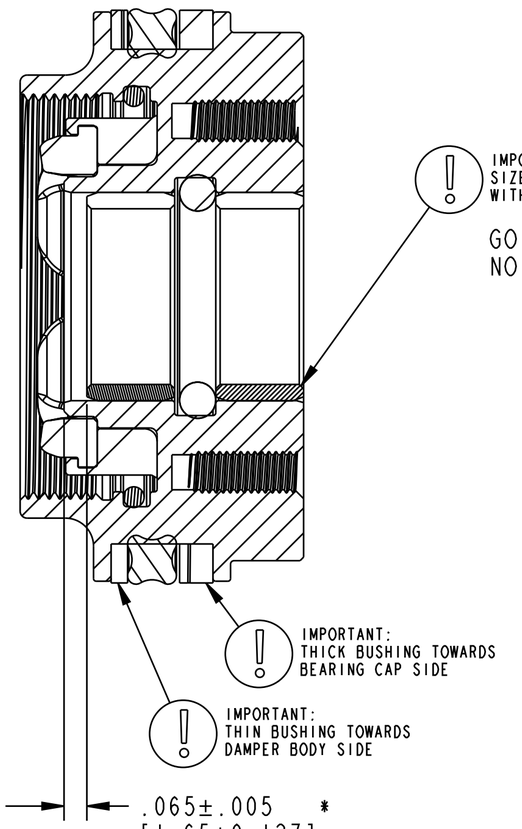

IMPORTANT:
SIZE BUSHING AND 100% CHECK WITH GO AND NO-GO PIN GAGES:


GO PIN GAGE: Ø.500
NO GO PIN GAGE: Ø.501

IMPORTANT:
THICK BUSHING TOWARDS BEARING CAP SIDE

IMPORTANT:
THIN BUSHING TOWARDS DAMPER BODY SIDE

.065±.005 *
[1,65±0,127]
BUSHING INSTALLATION DEPTH

SECTION A-A
SCALE 3:1

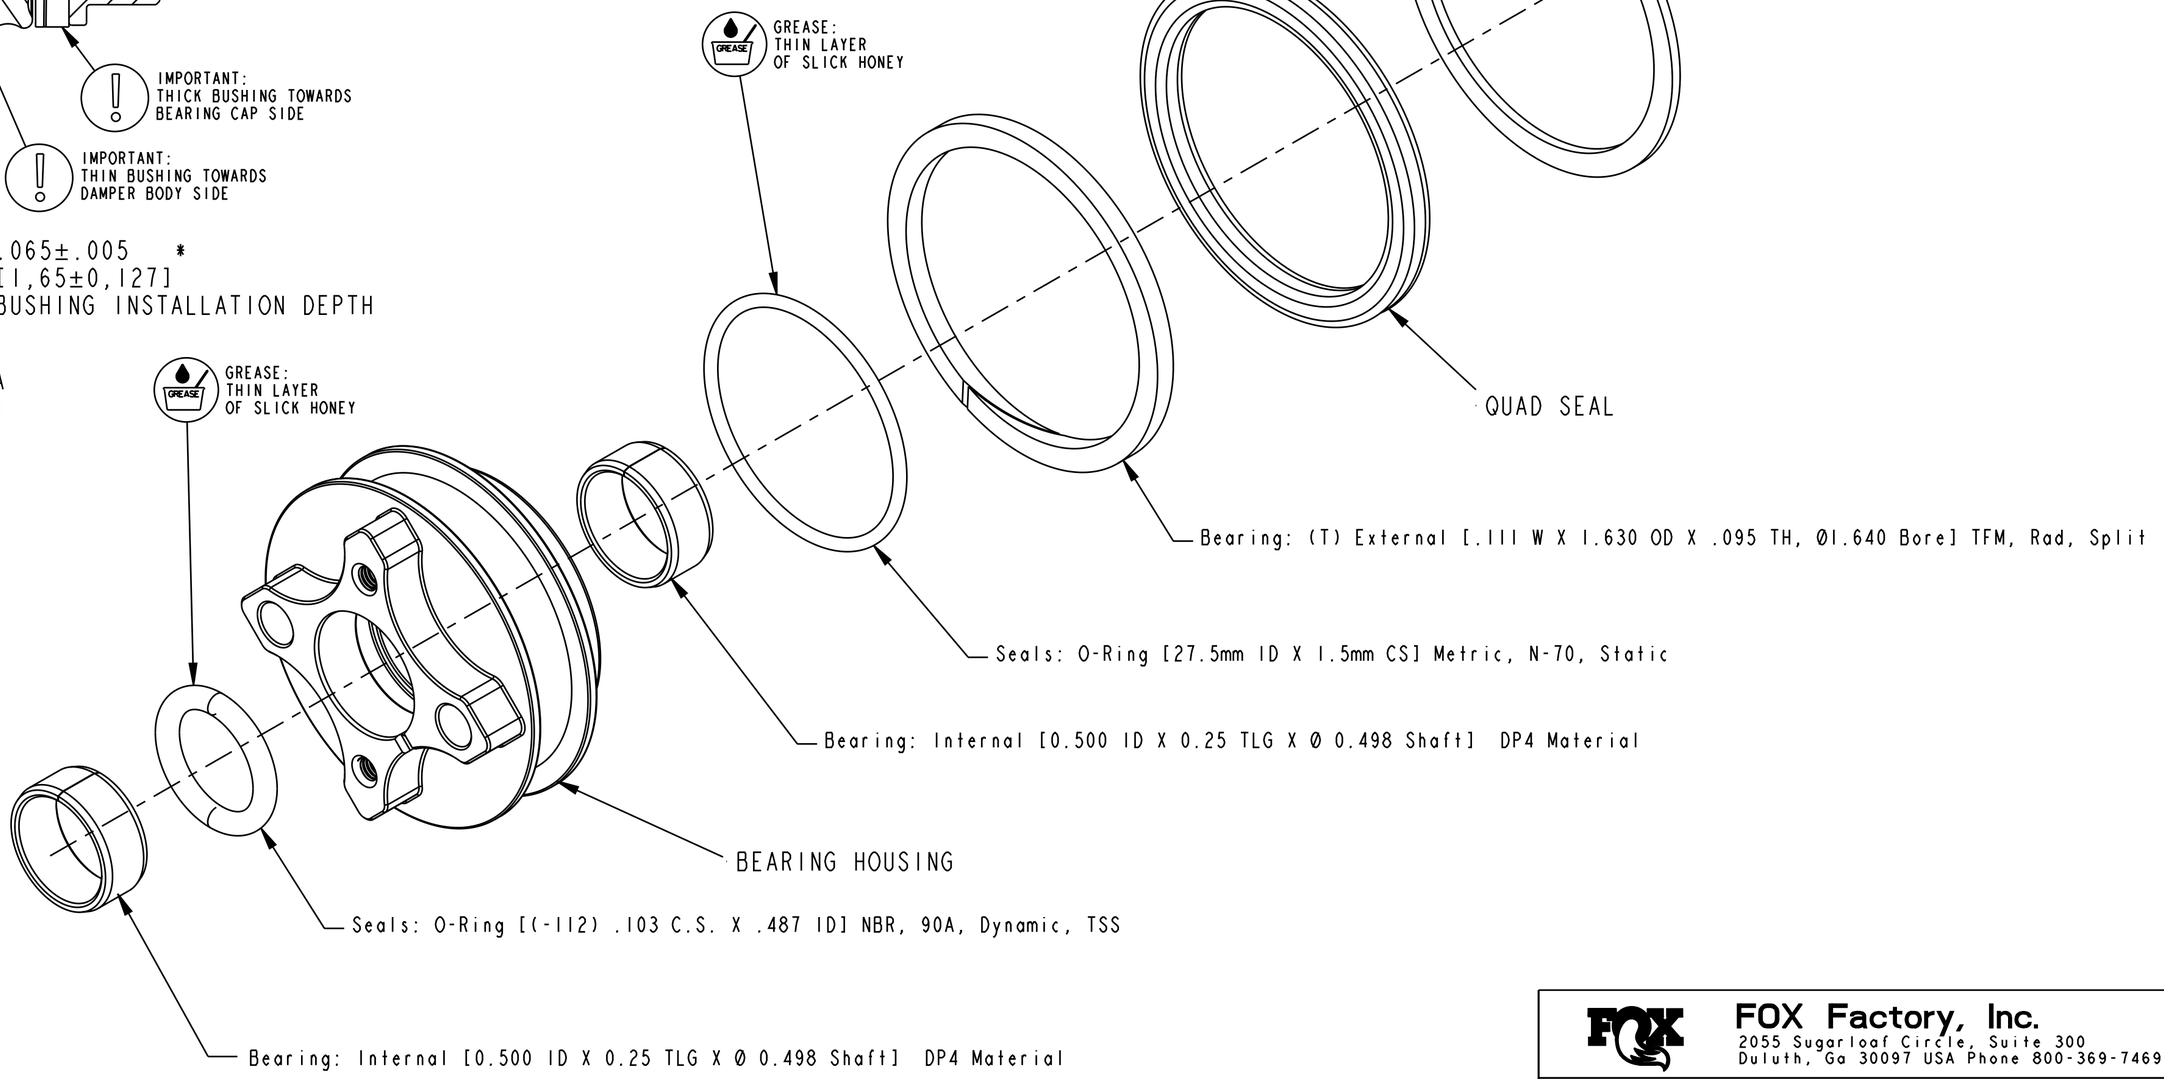

FOX Factory, Inc.
2055 Sugarloaf Circle, Suite 300
Duluth, Ga 30097 USA Phone 800-369-7469

TITLE
Bearing Housing Assy: 2027 FLOAT X, 37.5mm-45mm Std & 47.5mm-75mm Low Clearance

SIZE	DWG. NO.	REV
C	812-06-129-KIT (DEFAULT)	A

PLOT SCALE: 2:1 | SHEET: 1 OF 2