


4

3

2

1

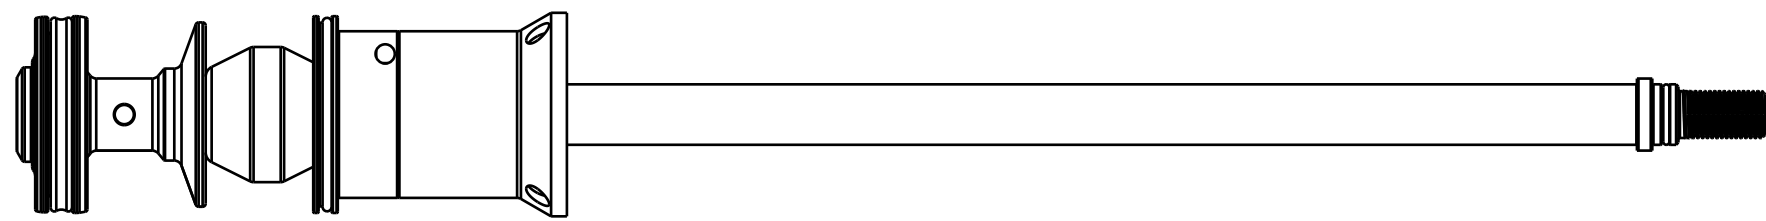

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

GREASE:
THIN LAYER
OF SLICK HONEY

234-04-759
NEG PLATE TUBE

234-04-627
NEG PLATE SPACER

TORQUE:
50±5 IN.LB.

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-317-KIT
NEG PLATE ASSY

234-04-629
Topout Bumper, FLOAT NA

LOCTITE:
1-2 DROPS
RED 262

PISTON SHAFT

234-04-621
PISTON BASE

TORQUE:
50±5 IN.LB.

GREASE:
THIN LAYER
OF SLICK HONEY

234-04-625
Piston Bolt, FLOAT NA

LOCTITE:
1-2 DROPS
RED 262

(234-04-622)

029-00-106
O-Ring (-106) [1.103 C.S. X .206 ID]

234-04-622
Bushing, Transfer Shaft, FLOAT NA


029-03-014
O-Ring (-014) [1.070 C.S. X .489 ID]

035-06-214
PISTON SEAL

234-04-818
PISTON, FLOAT NA

TORQUE:
50±5 IN.LB.

LOCTITE:
1-2 DROPS
RED 262

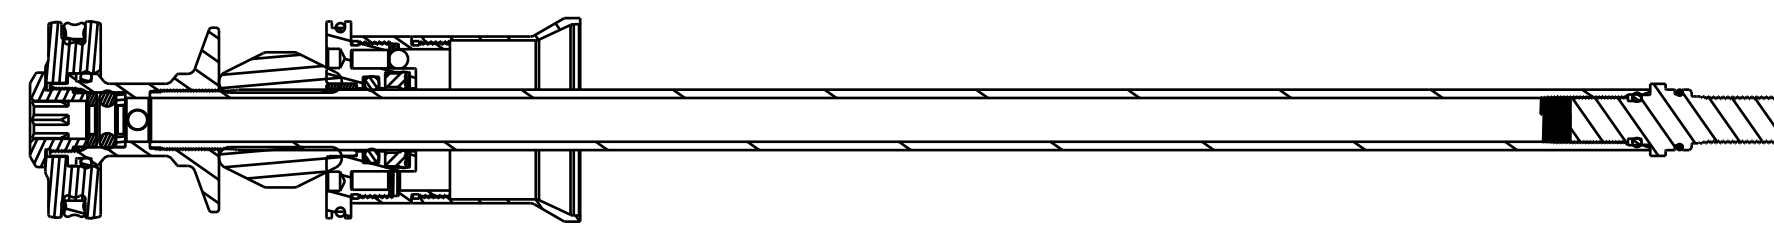

SECTION A-A

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**36 Air Shaft,
FLOAT NA**

SIZE DWG. NO.
C
PLOT SCALE 0.80:1 SHEET 1 OF 1

4

3

2

1

ProE ASSEM