

Bearing: External, Turcon [.136W x .869OD x .031THK]

Seals: O-Ring [17.0MM ID x 1.0MM CS] Metric, N-70, Static

Piston: Damping, .868in Bore, .250in Post, X2

Valve: [.700 OD X .252 ID X .0045 TH]

044-04-070

222-01-317

029-08-040

002-02-077

(044-04-070)

043-15-071

Valve: Ring Shim [0.700 OD X 0.610 ID X 0.015 TH]

044-04-060

Valve: [.600 OD X .252 ID X .0045 TH]

(044-20-035)

(044-04-060)

044-04-050

Valve: [.500 OD X .252 ID X .0045 TH]


044-20-035

Valve: [.350 OD X .252 ID X .020 TH]

233-00-286

Spacer: Topout Plate [.250 ID X .783 OD X .070 THK] Steel

.191±.008
[4,85±0,20]

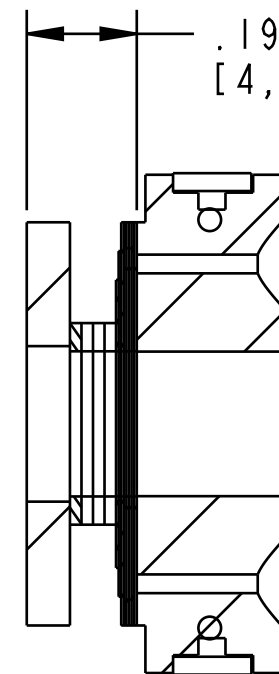

SECTION A-A
SCALE 3:1

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Piston Assembly:
2018, X2, .868in BORE, CF

SIZE DWG. NO. 805-00-105-KIT

PLOT SCALE | .60:1 | SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.