

4

3

2

1

AIR SHAFT ASSEMBLIES:
 820-02-416-KIT: Air Shaft Assy, 2018, 32, 26in & 27.5 130mm, FLOAT LC NA 2, 1.110 Bore
 820-02-417-KIT: Air Shaft Assy, 2018, 32, 26in & 27.5 140mm, FLOAT LC NA 2, 1.110 Bore
 820-02-418-KIT: Air Shaft Assy, 2018, 32, 26in & 27.5 150mm, FLOAT LC NA 2, 1.110 Bore

029-03-008
 O-Ring (-008) [.070 C.S. X .176 ID]

820-05-420-KIT
 Topcap Assy, 2018 FLOAT LC NA2, 34, SPD-PED-ELEC, Black

GREASE:
 THIN LAYER
 OF SLICK HONEY

234-04-881
 Air Cap, FLOAT NA 2, 32 & 34, Blue Ano

TORQUE:
 220±5 IN.LB.
 (INTO FORK CHASSIS)

234-04-811
 Volume Spacer, FLOAT NA 2, 32

APPLY GREASE AROUND PISTON, ON AIR SHAFT,
 BETWEEN BUMPER AND NEG PLATE, AND A THIN LAYER ON ENTIRE
 LENGTH OF PISTON BORE OF UPPER TUBE ID.



241-00-005
 Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
 Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

038-00-091
 Retaining Ring: Internal, Smalley EH-29-S02, 302 SS

IMPORTANT:
 INSPECT 100% THAT RETAINING RING
 IS FULLY INSTALLED INTO GROOVE FULL 360°

TORQUE:
 50±5 IN.LB.
 (INTO FORK CHASSIS)

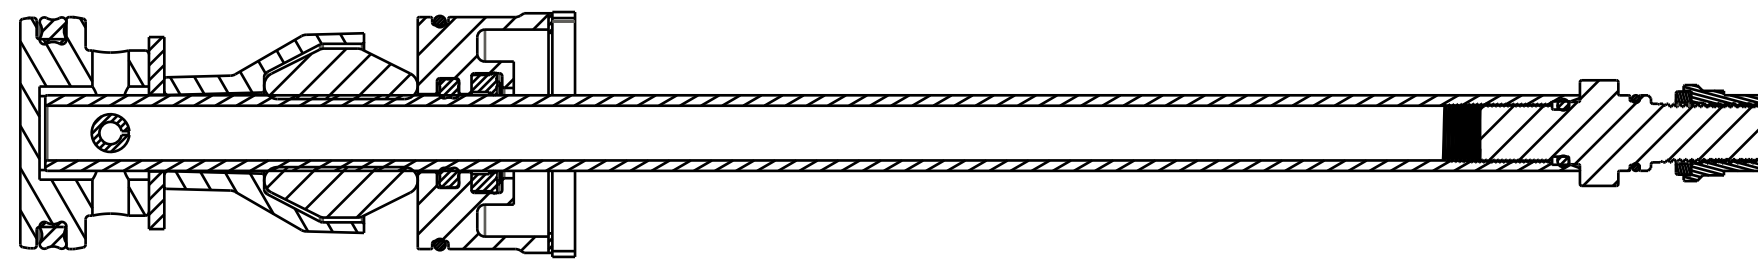

SECTION A-A

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312	
TITLE 2019 34 E-Bike+ FLOAT			
NA2 Air Spring Assemblies			
SIZE	DWG. NO.		
C			
PLOT SCALE .00:1		SHEET OF	