


4

3

2

1

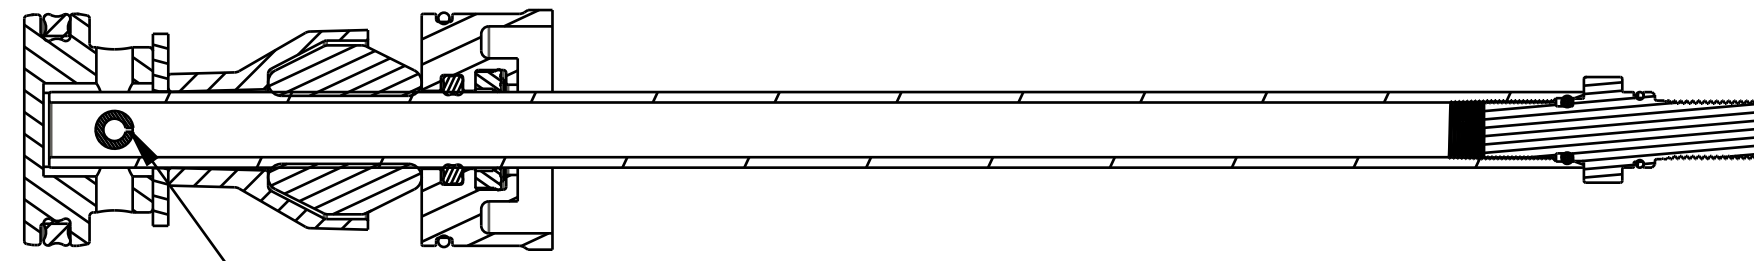

IMPORTANT:  
ORIENT GAP IN PIN TOWARDS  
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-629  
Topout Bumper, FLOAT NA

029-08-060

029-08-022

TORQUE:  
50±5 IN LB

GREASE:  
THIN LAYER  
OF SLICK HONEY

820-02-463-KIT  
Neg Plate Subassembly, 2019, 36 Rhythm, 1.275 Bore

035-00-214  
Seals: Q-Ring [(-214) .139 C.S. X 0.984 ID]

222-01-336  
Piston, FLOAT NA 2 LC, 36 Rhythm, 1.270 Bore

LOCTITE:  
1-2 DROPS  
RED 262

234-04-739  
Topout Spacer, Float, Rhythm

Shaft, Air Spring, 2019 Rhythm 36, Small Lower Pin

IMPORTANT:  
PRESS PIN UNTIL CENTERED

060-01-010  
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**Air Shaft Assemblies,**  
**2019, 36 Rhythm, 130-180mm, 1.275 Bore**

SIZE DWG. NO.  
**C**  
PLOT SCALE 1:1:1 SHEET 1 OF 1

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM