

| Air Shaft Assemblies: | |
|-----------------------|---|
| 820-02-464-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 180mm, 1.275 Bore |
| 820-02-465-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 170mm, 1.275 Bore |
| 820-02-466-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 160mm, 1.275 Bore |
| 820-02-467-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 150mm, 1.275 Bore |
| 820-02-468-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 140mm, 1.275 Bore |
| 820-02-469-KIT | Service Set: Air Shaft Assy, 2019, 36 Rhythm, 130mm, 1.275 Bore |

241-00-005
Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

TORQUE:
50±5 IN.LB.
(INTO FORK CHASSIS)

IMPORTANT:
INSPECT 100% THAT RETAINING RING
IS FULLY INSTALLED INTO GROOVE FULL 360°

038-00-027
Retaining Ring: Internal, Smalley DNH-33-SO2, 302 SST

234-44-096
Neg Plate Spacer, Rhythm 36, 1.275in UT Bore, Aluminum

029-03-008
O-Ring (-008) [.070 C.S. X .176 ID]

820-05-419-KIT
Topcap Assy, 2018 FLOAT LC NA2, 36, Black


APPLY GREASE AROUND PISTON, ON AIR SHAFT,
BETWEEN BUMPER AND NEG PLATE, AND A THIN LAYER ON ENTIRE
LENGTH OF PISTON BORE OF UPPER TUBE ID.

234-44-079
Volume Spacer, FLOAT NA 2, 36 Rhythm

TORQUE:
220±5 IN.LB.
(INTO FORK CHASSIS)

GREASE:
THIN LAYER
OF SLICK HONEY

210-24-433
2019 Marzocchi Bomber Z1 & 58 Air Knob

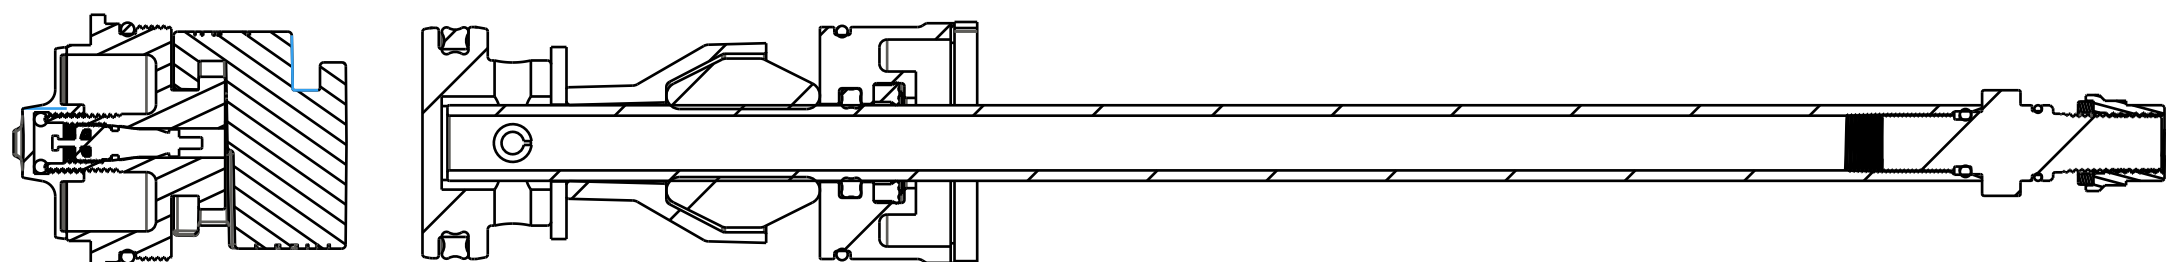

SECTION A-A

PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**Air Spring Assy, 2019 Marzocchi
Bomber Z1 36, 130-180mm, 1.275 Bore**

SIZE DWG. NO.
C

PLOT SCALE | .00:1 | SHEET | OF |